

Contract No:

This document was prepared in conjunction with work accomplished under Contract No. DE-AC09-08SR22470 with the U.S. Department of Energy (DOE) Office of Environmental Management (EM).

Disclaimer:

This work was prepared under an agreement with and funded by the U.S. Government. Neither the U. S. Government or its employees, nor any of its contractors, subcontractors or their employees, makes any express or implied:

- 1) warranty or assumes any legal liability for the accuracy, completeness, or for the use or results of such use of any information, product, or process disclosed; or
- 2) representation that such use or results of such use would not infringe privately owned rights; or
- 3) endorsement or recommendation of any specifically identified commercial product, process, or service.

Any views and opinions of authors expressed in this work do not necessarily state or reflect those of the United States Government, or its contractors, or subcontractors.



**Savannah River
National Laboratory**™

OPERATED BY SAVANNAH RIVER NUCLEAR SOLUTIONS

A U.S. DEPARTMENT OF ENERGY NATIONAL LABORATORY • SAVANNAH RIVER SITE • AIKEN, SC

Radiological Environmental Dose Assessment Methods and Compliance Dose Results for 2015 Operations at the Savannah River Site

G.T. Jannik and K.L. Dixon

September 2016

SRNL-STI-2016-00473, Revision 0

DISCLAIMER

This work was prepared under an agreement with and funded by the U.S. Government. Neither the U.S. Government or its employees, nor any of its contractors, subcontractors or their employees, makes any express or implied:

1. warranty or assumes any legal liability for the accuracy, completeness, or for the use or results of such use of any information, product, or process disclosed; or
2. representation that such use or results of such use would not infringe privately owned rights; or
3. endorsement or recommendation of any specifically identified commercial product, process, or service.

Any views and opinions of authors expressed in this work do not necessarily state or reflect those of the United States Government, or its contractors, or subcontractors.

Printed in the United States of America

**Prepared for
U.S. Department of Energy**

REVIEWS AND APPROVALS

AUTHOR:

G.T. Jannik, Environmental Sciences

Date

TECHNICAL REVIEW:

K.L. Dixon, Geosciences

Date

APPROVAL:

JJ. Mayer, II, Manager
Environmental Sciences and BioTechnology

Date

T.P. Eddy, Manager, Sample Data Management

Date

EXECUTIVE SUMMARY

This report presents the environmental dose assessment methods and the estimated potential doses to the offsite public from 2015 Savannah River Site (SRS) atmospheric and liquid radioactive releases. Also documented are potential doses from special-case exposure scenarios - such as the consumption of deer meat, fish, and goat milk.

Dose to the Offsite Representative Person

The 2015 dose to the offsite representative person from SRS liquid releases was 0.15 mrem and from SRS air releases was 0.032 mrem. To show compliance with the US Department of Energy (DOE) all-pathway dose standard of 100 mrem/yr, SRS conservatively adds these two doses for a total representative person dose of 0.18 mrem, which is 0.18% of the DOE standard.

Sportsman Doses

Onsite Hunter: SRS conducts annual hunts to control onsite deer and feral hog populations. The estimated dose from the consumption of harvested deer or hog meat is determined for every onsite hunter. During 2015, the maximum dose that could have been received by an onsite hunter was estimated at 12.9 mrem, or 12.9% of DOE's 100 mrem/yr all-pathway dose standard.

Creek Mouth Fisherman: SRS estimated the maximum potential dose from fish consumption at 0.28 mrem from bass collected at the mouth of Lower Three Runs. This dose is 0.28% of the DOE standard. SRS bases this hypothetical dose on the low probability scenario that, during 2015, a fisherman consumed 53 lb of bass caught exclusively from the mouth of Lower Three Runs.

Release of Material Containing Residual Radioactivity

SRS did not release any real property (land or buildings) in 2015. SRS unconditionally released a total of 10,124 items of personal property (such as tools) from radiological areas in 2015. Most of these items did not leave the Site. However, all of these items required no additional radiological controls post survey, as they met DOE Order 458.1 release criteria.

Radiation Dose to Aquatic and Terrestrial Biota

SRS conducts screening evaluations of plant and animal doses for aquatic and terrestrial ecosystems. For 2015, all SRS water, sediment, and soil locations passed this screening. No further assessments were required.

TABLE OF CONTENTS

EXECUTIVE SUMMARY	iii
LIST OF TABLES	vi
LIST OF FIGURES	vi
LIST OF APPENDIX DATA TABLES	vii
Introduction.....	1
1.0 Dose Assessment Methods.....	1
1.1 Representative Person	1
1.2 Dose Models.....	3
1.3 Dose Coefficients	4
1.4 Meteorological Database.....	4
1.5 Population Database and Distribution.....	4
1.6 Savannah River Flow Rate Data	5
2.0 Dose Calculation Results	7
2.1 Liquid Pathway Doses.....	7
2.1.1 Liquid Release Source Terms	7
2.1.2 Radionuclide Concentrations in Savannah River Water, Drinking Water, and Fish.....	7
2.1.2.1 Radionuclide Concentrations in River Water and Treated Drinking Water.....	7
2.1.2.2 Radionuclide Concentrations in Fish	9
2.1.2.3 Dose to the Representative Person.....	9
2.1.2.4 Drinking Water Pathway Dose.....	10
2.1.2.5 Collective (Population) Dose	10
2.2 Air Pathway Doses	11
2.2.1 Atmospheric Source Terms	11
2.2.2 Atmospheric Concentrations	11
2.2.3 Dose to the Representative Person.....	11
2.2.4 Collective (Population) Dose.....	12
2.2.5 National Emission Standards for Hazardous Air Pollutants (NESHAP) Compliance.....	14
2.2.5.1 Maximally Exposed Individual Dose.....	14
2.2.5.2 Dose from Diffuse and Fugitive Releases.....	14
2.2.5.3 Collective Dose	14
2.3 All-Pathway Dose.....	15
2.4 Sportsman Dose.....	16
2.4.1.1 Turkey Consumption Pathway.....	16

2.4.2 Hypothetical Offsite Hunter Doses.....	16
2.4.2.1 Deer and Hog Consumption Pathway	16
2.4.2.2 Savannah River Swamp Hunter Soil Exposure Pathway	16
2.4.3 Hypothetical Offsite Fisherman Dose and Risk	17
2.4.3.1 Creek-Mouth Fish Consumption Pathway	17
2.4.3.2 Savannah River Swamp Fisherman Soil Exposure Pathway	17
2.4.3.3 Potential Risk from Consumption of SRS Creek-Mouth Fish	18
2.4.3.3.1 Risk Comparisons.....	18
3.0 Release of Material Containing Residual Radioactivity	20
3.1 Property Release Methodology	20
4.0 Radiation Dose to Aquatic and Terrestrial Biota	21
4.1 DOE Biota Concentration Guides	21
5.0 References.....	22
Appendix A.....	A-1

LIST OF TABLES

Table 1-1. SRS Reference and Typical Person Usage Parameters	3
Table 2-1. 2015 Radioactive Liquid Releases and 12-Month Average Downriver Radionuclide Concentrations Compared to the EPA's Drinking Water Maximum Contaminant Levels (MCL)	8
Table 2-2. Potential Dose to the Representative Person from SRS Liquid Releases in 2015.....	9
Table 2-3. Potential Doses to the Representative Person and to the MEI from SRS Atmospheric Releases in 2015 and Comparison to the Applicable Dose Standard	11
Table 2-4. 2015 Representative Person All-Pathways and Sportsman Doses Compared to the DOE All-Pathways Dose Standard	17
Table 2-5. Potential Lifetime Risks from the Consumption of Savannah River Fish Compared to Dose Standards	18

LIST OF FIGURES

Figure 1-1. Exposure Pathways to Humans from Atmospheric and Liquid Effluents.....	2
Figure 1-2. 2007-2011 Wind Rose for H-Area (Direction is toward which the wind blows).....	5
Figure 1-3. Savannah River Annual Average Flow Rates at River Mile 118.8.....	6
Figure 2-1. Radionuclide Contributions to the 2015 SRS Total Liquid Pathway Dose of 0.15 mrem (0.0015 mSv)	10
Figure 2-2. Radionuclide Contributions to the 2015 SRS Air Pathway Dose of 0.032 mrem.....	12
Figure 2-3. Sector-specific Representative Person Site Boundary Doses.....	13
Figure 2-4. Ten-Year History of SRS Maximum Potential All-Pathway Doses	15
Figure 2-5. History of SRS Maximum Potential Fisherman Doses and 30-y Projected Risks	19

LIST OF APPENDIX DATA TABLES

Data Table A-1. Parameters Used for Liquid Pathway Dose Calculations.....	A-1
Data Table A-2. Site-Specific Parameters Used for Airborne Pathway Doses.....	A-3
Data Table A-3. Meteorological Data (2007-2011).....	A-4
Data Table A-4. Population Distribution Around SRS (2010 Census).....	A-11
Data Table A-5. Savannah River Mile 118.8 Flow Rates, 1954-2014.....	A-12
Data Table A-6. Calculated Effective River Flow Rates	A-13
Data Table A-7. Radioactive Liquid Releases by Source (Curies).....	A-14
Data Table A-8. Radioactive Liquid Releases, 2011-2015 (Curies).....	A-15
Data Table A-9. Radionuclide Concentrations at Downriver Drinking Water Plants Compared to EPA MCLs.....	A-16
Data Table A-10. Adjustment of Cs-137 Release Based on Fish Concentrations	A-18
Data Table A-11. Representative Person Dose - All Liquid Pathways Including Irrigation	A-20
Data Table A-12. Comparison of 2011-2015 Offsite Doses.....	A-22
Data Table A-13. Representative Person Drinking Water Dose.....	A-23
Data Table A-14. Collective Drinking Water Doses (person-rem).....	A-24
Data Table A-15. Collective Dose - All Liquid Pathways Including Irrigation	A-25
Data Table A-16. Radioactive Atmospheric Releases by Source (Curies)(a).....	A-26
Data Table A-17. 2011-2015 Atmospheric Releases (Curies).....	A-28
Data Table A-18. Comparison of Measured vs. Calculated Tritium in Air Concentrations.....	A-31
Data Table A-19. MAXDOSE-SR Representative Person Dose Using Cow Milk Pathway.....	A-32
Data Table A-20. Sector-Specific Representative Person Airborne Pathway Doses (Using Cow Milk Pathway).....	A-33
Data Table A-21. MAXDOSE-SR Representative Person Dose Using Goat Milk Pathway	A-34
Data Table A-22. POPDOSE-SR Population Dose from Airborne Releases	A-35
Data Table A-23. Airborne Releases by Source and Stack Height for NESHAP.....	A-36
Data Table A-24. Site-Specific Parameters Used with CAP88 PC for NESHAP	A-38
Data Table A-25. Radioactive Atmospheric Releases and MEI Doses for NESHAP	A-39
Data Table A-26. Diffuse and Fugitive Releases and MEI Doses for NESHAP.....	A-41

Data Table A-27. CAP88 MEI Dose Compared to MAXDOSE-SR.....	A-43
Data Table A-28. CAP88 PC Population Dose Compared to POPDOSE-SR.....	A-44
Data Table A-29. Deer and Hog Hunter Doses.....	A-45
Data Table A-30a. Average Concentration in Composites Used in the Dose Calculations (pCi/g)	A-46
Data Table A-30b. Total Dose from Consumption of 24 kg/y from Savannah River Fish (mrem).....	A-47
Data Table A-30c. Total Risk from Consumption of 24 kg/y from Savannah River Fish (risk/year)...	A-48
Data Table A-31. SRS Supplemental Release Criteria	A-49
Data Table A-32. Biota Dose Assessment	A-50

Introduction

This report presents environmental dose assessment methods and the estimated potential doses to the offsite public from 2015 Savannah River Site (SRS) atmospheric and liquid radioactive releases. Also documented are potential doses from special-case exposure scenarios, such as the consumption of deer meat, fish, and goat milk. Unless noted, the generic term “dose,” as used in this report, includes both the committed effective dose (50-year committed dose) from internal deposition of radionuclides and the effective dose attributable to sources external to the body. Use of the effective dose allows doses from different types of radiation and to different parts of the body to be expressed on the same basis.

Humans, plants, and animals potentially receive radiation doses from natural and man-made occurrences. The average annual “background” dose for all people living in the United States is 625 mrem. This includes an average background dose of 311 mrem from naturally occurring radionuclides (found in our bodies and in the earth) and from cosmic radiation. Man-made sources include medical procedures (300 mrem), consumer products (13 mrem), and less than 1 mrem from industrial and occupational exposures.

The U.S. Department of Energy (DOE) has established dose limits to the public, so that DOE operations will not contribute significantly to this average annual exposure. DOE Order 458.1 (DOE 2013) establishes 100 mrem/yr (1 mSv/yr) as the annual dose limit to a member of the public. As shown in Figure 1-1, exposure to radiation primarily occurs through the following pathways:

- Inhalation,
- Ingestion,
- Skin absorption, and
- Direct (external) exposure to radionuclides in soil, air, and water.

1.0 Dose Assessment Methods

DOE O 458.1 (2011a) states that compliance with the DOE annual dose limit of 100 mrem (1 mSv), regarding a member of the public, may be demonstrated by calculating dose to the maximally exposed individual (MEI) or to a representative person. Historically, the MEI concept was used for dose compliance at SRS using adult dose coefficients and adult male usage parameters. Beginning in 2012, SRS now uses the representative person concept for dose compliance.

1.1 Representative Person

In DOE O 458.1, the representative person is defined as an individual receiving a dose that is representative of the more highly exposed individuals in the population. This term is equivalent of, and replaces, “average member of the critical group.” However, in the *International Commission on Radiological Protection (ICRP) Report 101* (ICRP 2006), the definition is extended to include the ...average value for the more highly exposed group OR the 95th percentile of appropriate national or regional data. The OR is highlighted for emphasis. At SRS, the reference person who is at the 95th percentile of national usage data is now used as a replacement for the MEI.

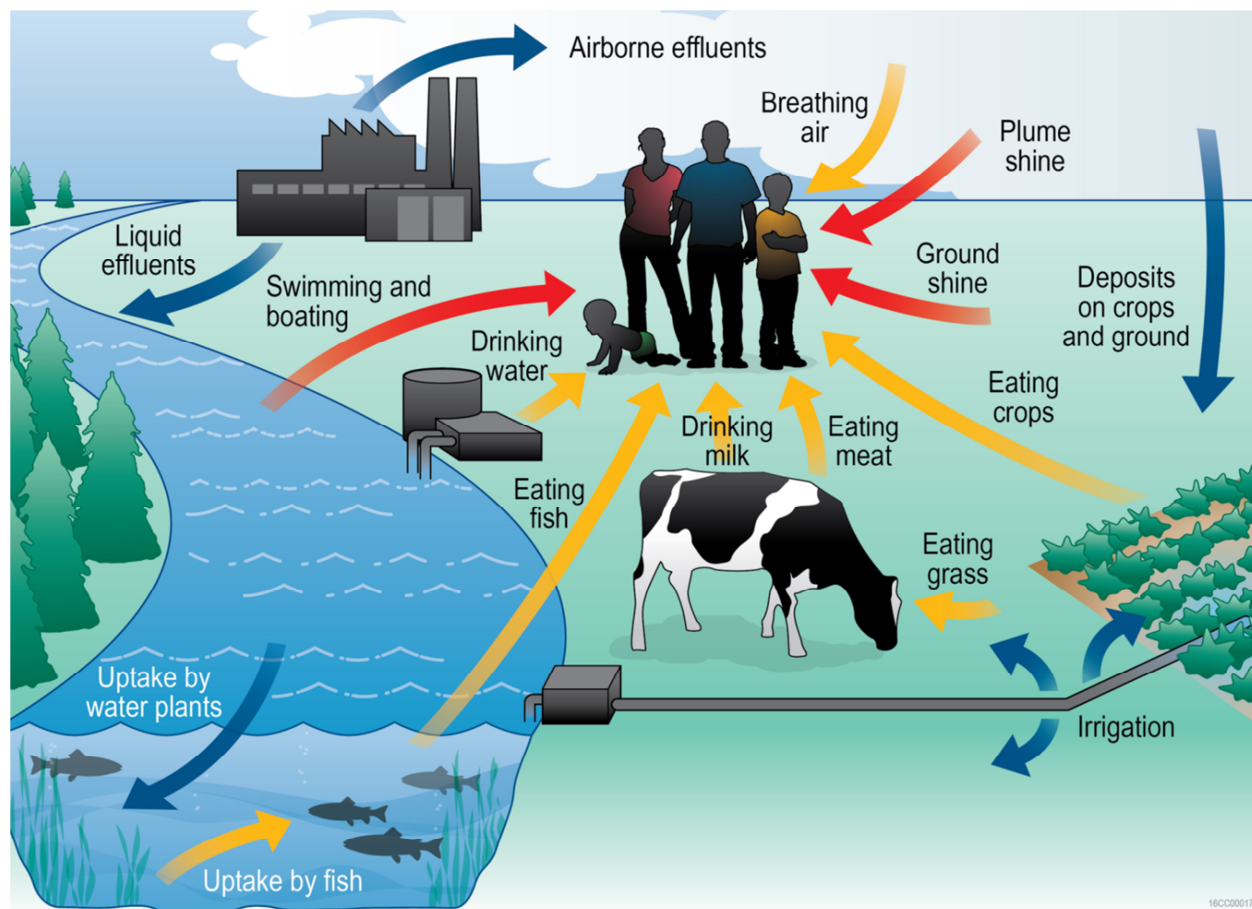


Figure 1-1. Exposure Pathways to Humans from Atmospheric and Liquid Effluents

The representative person dose is based on reference person usage parameters (at the 95th percentile of national and regional data) developed specifically for SRS. The applicable national and regional data used are from the *USEPA Exposure Factor Handbook*, 2011 Edition (EPA 2011).

The reference person is weighted, based on sex and age, and this weighting is based on the six age groups documented in Report 89 (ICRP 2002): Infant (0 years), 1 year, 5 years, 10 years, 15 years, and Adult. The various age- and gender-specific intake rates from USEPA (2011) were proportioned to correspond with these respective age groupings. SRS developed usage parameters at the 50th percentile, which are used in calculating dose to a “typical” person for determining collective doses. The SRS-specific reference and typical-person usage parameters were developed by Stone and Jannik (2013) and are provided in Table 1-1.

All other applicable land- and water- use parameters used in the dose calculations are documented in the *Land and Water Use Characteristics and Human Health Input Parameters for use in Environmental Dosimetry and Risk Assessments at the Savannah River Site* (Jannik et al., 2016). These parameters include local characteristics of food production, river recreational activities, and other human usage parameters required in the SRS dosimetry models. In addition, SRS documents the preferred elemental bioaccumulation and transfer factors to be used in human health exposure calculations in this report. Data Table A-1 and Data Table A-2 provide a summary of the site-specific input parameters that are the most important to the dose calculations for the liquid and airborne pathways, respectively.

Table 1-1. SRS Reference and Typical Person Usage Parameters

	Unit	Reference Person	Typical Person
Air	m ³ /y	6,400	5,000 ^a
Water	L/y	800	300 ^b
Meat	kg/y	81	32 ^c
Leafy Vegetables	kg/y	31	11
Other Produce	kg/y	289	89
Milk/Dairy	L/y	260	69
Freshwater Fish	kg/y	24	3.7
Saltwater Invertebrate	kg/y	9.0	1.5

^a 1 cubic meter = 1.3 cubic yards

^b 1 liter = 1.06 quarts

^c 1 kilogram = 2.2 pounds

1.2 Dose Models

For determining compliance with DOE public dose requirements, SRS calculates the potential offsite doses from SRS effluent releases of radioactive materials (atmospheric and liquid) for the following scenarios:

- Representative Person living at the SRS boundary
- Population living within a 50-mile (80-kilometer [km]) radius of SRS

To demonstrate compliance with the DOE O 458.1, all-pathway dose standard of 100 mrem per year, SRS conservatively combines the airborne pathway and liquid pathway dose estimates, even though the two doses are calculated for hypothetical individuals residing at different geographic locations.

For SRS dose calculations, unspecified alpha releases were treated as plutonium-239, and unspecified beta releases, as strontium-90. These radionuclides have the highest dose factors of the alpha- and beta-emitters, respectively, commonly measured in SRS waste streams.

SRS has assessed the potential effects of routine radioactive releases annually since operations began and, since 1972, has published annual offsite dose estimates in Site environmental reports made available to the public. For all routine environmental dose calculations performed since 1978, SRS has used environmental transport models, based on codes developed by the Nuclear Regulatory Commission (NRC) (NRC 1977). The NRC-based transport models use DOE accepted methods, consider all significant exposure pathways, and permit detailed analysis of the effects of routine operations. For showing compliance with DOE O 458.1 at SRS, the MAXDOSE-SR and POPDOSE-SR codes are used for atmospheric releases (representative person and population, respectively) and LADTAP XL© is used for liquid releases. The *SRS Environmental Dose Assessment Manual* (SRNL EDAM 2012) describes these models.

To demonstrate compliance with EPA National Emission Standards for Hazardous Air Pollutants (NESHAP) regulations (EPA 2006), MEI and collective doses were calculated using 1) the CAP88 PC version 4.0.1.17 computer code, 2) the 2014 airborne-release source term (Data Table A-23), and 3) site-specific input parameters (Data Table A-24). The EPA requires the use of the MEI and does not allow use of the reference person concept at this time. The EPA hard-codes most of the input parameters in the CAP88 PC program, and they cannot be changed without EPA approval.

1.3 Dose Coefficients

From 1988 through 2009, SRS used the internal and external dose conversion factors provided in DOE [1988]. In 2010, the internal dose conversion factors were updated to use the dose factors from ICRP Publication 72, (ICRP 1996) and the external dose conversion factors were updated to the dose factors provided in *Federal Guidance Report 12*, (EPA 1993). Beginning in 2012, the dose to a representative person is based on: 1) the SRS-specific reference person usage parameters at the 95th percentile of appropriate national or regional data, which are documented in Stone and Jannik (2013), 2) the reference person (gender- and age-averaged) ingestion and inhalation dose coefficients provided in *DOE Derived Concentration Technical Standard*, DOE-STD-1196-2011 (DOE 2011), and 3) the external dose coefficients provided in the DC_PAK3 toolbox. The DC_PAK3 toolbox can be accessed at <http://www.epa.gov/rpdweb00/federal/techdocs.html>. Currently, there are no age-specific external dose factors available.

1.4 Meteorological Database

Potential offsite doses from releases of radioactivity to the atmosphere were calculated with quality-assured meteorological data for A-Area, K-Area (for combined releases from C-Area, K-Area, and L-Area), and H-Area (for combined releases from all other areas). To show compliance with NESHAP regulations (EPA 2006), only the H-Area meteorological database was used in the calculations, because the EPA-required dosimetry code (CAP88 PC version 4.0.1.17) is limited to a single release location.

The current five-year meteorological datasets used in dose calculations cover the period 2007 through 2011 (Viner, 2013). These datasets differ from previous five-year datasets in that they now 1) estimate atmospheric stability using the standard deviation of the vertical wind velocity and 2) use an updated surface roughness factor for SRS. Data Table A-3 shows the 2007 through 2011 meteorological database for H-Area. Figure 1-2 is the H-Area wind rose for 2007-2011, with the directions shown being toward which the wind blows. As shown, the wind blows towards the East-Northeast the highest percentage time (about 9%).

1.5 Population Database and Distribution

SRS calculates the collective (population) doses from atmospheric releases for the population within a 50-mile radius of the Site. Based on the U.S. Census Bureau's 2010 data, the population within a 50-mile radius of the center of SRS is 781,060. This translates to an average population density of about 104 people per square mile outside the SRS boundary, with the largest concentration in the Augusta metropolitan area. Data Table A-4 shows the population distribution around SRS.

Some of the collective doses resulting from SRS liquid releases are calculated for the populations served by the City of Savannah Industrial and Domestic Water Supply Plant (City of Savannah I&D), near Port Wentworth, Georgia, and for the Beaufort-Jasper Water and Sewer Authority's (BJWSA) Chelsea and Purrysburg Water Treatment Plants, both near Beaufort, South Carolina. According to the treatment plant operators, the population served by the City of Savannah I&D facility during 2015 was 35,000 people, while the population served by the BJWSA Chelsea facility was 82,900 people and by the BJWSA Purrysburg facility, 64,200 people. The total population dose resulting from routine SRS liquid releases is the sum of five contributing categories: 1) BJWSA water consumers, 2) City of Savannah I&D water consumers, 3) consumption of fish and invertebrates of Savannah River origin, 4) recreational activities on the Savannah River, and 5) irrigation of foodstuffs using river water near River Mile (RM) 118.8 (U.S. Highway 301 bridge).

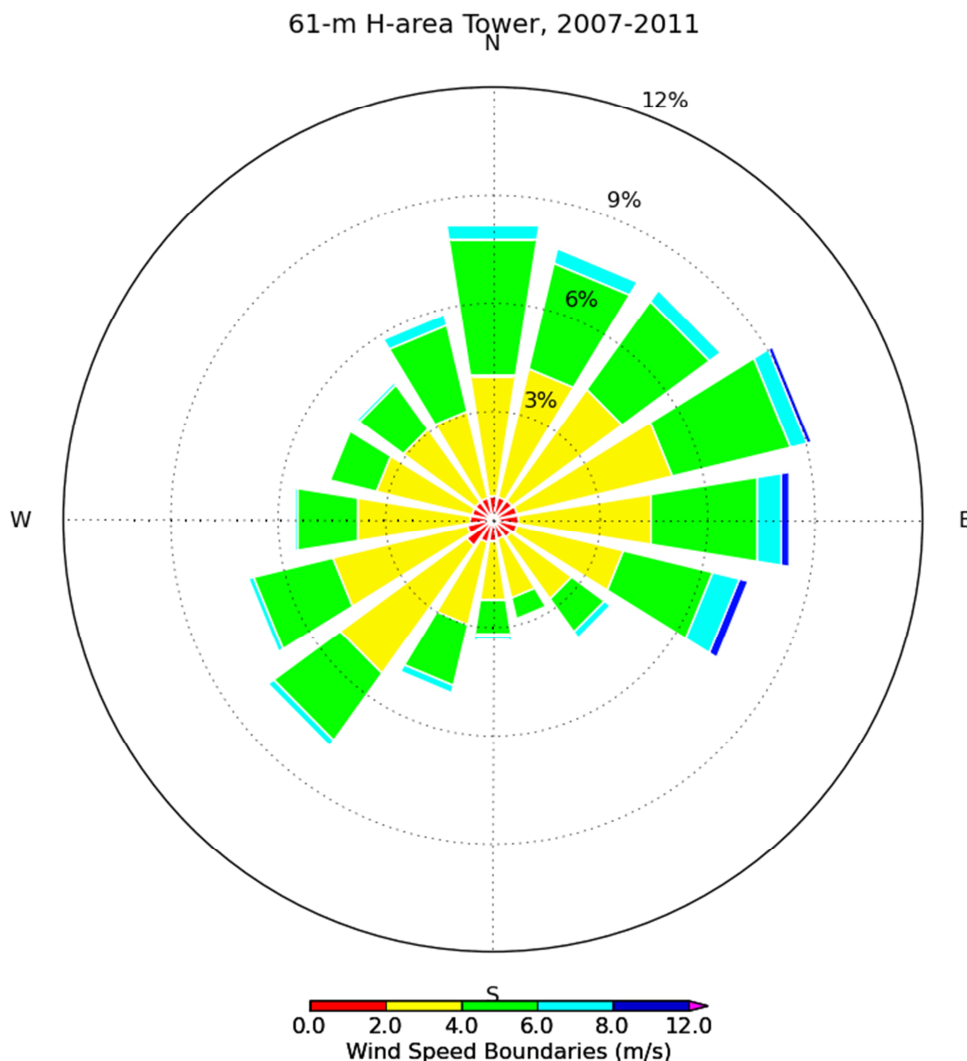


Figure 1-2. 2007-2011 Wind Rose for H-Area (Direction is toward which the wind blows)

1.6 Savannah River Flow Rate Data

Savannah River flow rates are determined using the recorded water elevation at a US Geological Survey (USGS) gauging station #02197500, near RM 118.8. The river flow rates measured at this location (from 1954 through 2015) are provided in Data Table A-5. Figure 1-3 shows that the average river flow rate for these years is about 10,000 cubic feet per second (cfs). However, recently, there has been a downward trend in these data, with an average measured flow rate of just 7,237 cfs during the past 10 years.

The SRS liquid dose calculations typically do not use these data. Instead, “effective” flow rates based on 1) the measured annual release of tritium and 2) the annual average tritium concentrations measured from RM 118.8 and from the downriver water treatment plants are used. Data Table A-6 provides the effective river flow rate calculations.

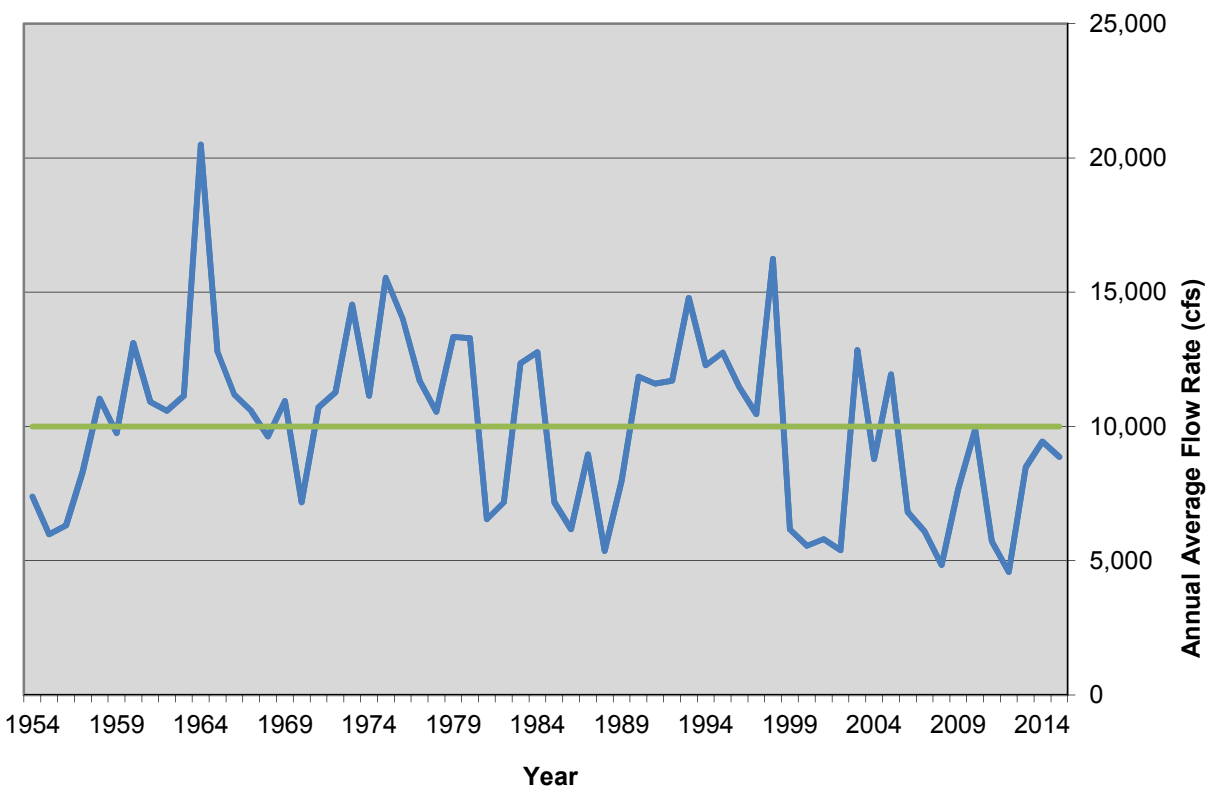


Figure 1-3. Savannah River Annual Average Flow Rates at River Mile 118.8

The use of effective flow rates in the dose calculations is usually more conservative (that is, it results in higher dose estimates) than the use of measured flow rates, because it accounts for less dilution. However, if SRS calculates an effective flow that is more than the measured value at RM 118.8, then the measured value is used for conservatism.

For 2015, SRS used an effective Savannah River flow rate of 5,972 cfs in the dose calculations. The 2015 effective flow rate is 30% less than the 2014 effective flow rate of 8,531 cfs. This estimated flow rate (based on actual measured tritium concentrations in the river) is more conservative than the 2015 USGS measured flow rate of 8,833 cfs.

2.0 Dose Calculation Results

2.1 Liquid Pathway Doses

No known large-scale uses of Savannah River water downstream of SRS exist for agricultural irrigation purposes. However, the potential for agricultural irrigation does exist, especially for individual garden use. Therefore, the doses from the irrigation pathway are included in the totals for the SRS representative person and collective doses.

2.1.1 Liquid Release Source Terms

Table 2-1 shows, by radionuclide, the 2015 radioactive liquid release quantities used as the source term in SRS dose calculations, and Data Table A-7 shows these liquid releases by Site stream. Data Table A-8 provides a five-year history of SRS liquid radioactive releases.

Tritium accounts for more than 99% of the total amount of radioactivity released from the Site to the Savannah River. In 2015, SRS released a total of 786 curies of tritium to the river, a 12% increase from the 2014 amount of 699 curies.

In 2015, the Georgia Power Company's Vogtle Electric Generating Plant (VEGP) released 1,709 curies of tritium to the Savannah River and 70 curies migrated from the Barnwell Low-Level Disposal Facility (BLLDF) for an overall total of 2,565 curies of tritium (SRS plus VEGP plus BLLDF). This is a 13% decrease from the combined total of 2,933 curies in 2014.

2.1.2 Radionuclide Concentrations in Savannah River Water, Drinking Water, and Fish

At several locations along the Savannah River, SRS measures the concentrations of tritium in the river water and cesium-137 in fish. SRS uses these measurements to make dose determinations. The amounts of all other radionuclides released from SRS are so small that their concentration in the Savannah River usually cannot be detected using conventional analytical techniques. SRS calculates their concentrations in the river based on the annual release amounts and river flow rates (using the LADTAP XL code).

2.1.2.1 Radionuclide Concentrations in River Water and Treated Drinking Water

Table 2-1 shows the measured concentrations of tritium in the Savannah River near RM 118.8 and at the BJWSA Purrysburg water treatment facility, which is representative of the BJWSA Chelsea and the City of Savannah I&D water treatment plants. These downriver tritium concentrations include tritium releases from SRS and the VEGP and BLLDF. Also provided in Table 2-1 are the calculated concentrations for the other released radionuclides and a comparison of these concentrations to the Safe Drinking Water Act, 40 CFR 141 (EPA, 2000) maximum contaminant level (MCL) for each radionuclide.

In 2015, the 12-month average tritium concentration measured in Savannah River water near RM 118.8 was 481 picocuries per liter (pCi/L). This reflects a 25% increase from the 385 pCi/L measured in 2014. SRS attributes this increase to the 30% decrease in the estimated 2015 Savannah River flow, which caused less dilution to occur in the river.

Table 2-1 indicates that all individual radionuclide concentrations at the three downriver community drinking water systems, as well as at RM 118.8, were below the EPA MCLs. Because SRS releases more than one radionuclide, the sum of the fractions of the reported concentration of each radionuclide divided by its corresponding MCL must not exceed 1.0. As shown in Data Table A-9, the sum of the fractions for the water treatment plants (determined at the BJWSA Chelsea plant) was 0.028, which is below the 1.0 sum-of-the-fractions requirement.

Table 2-1. 2015 Radioactive Liquid Releases and 12-Month Average Downriver Radionuclide Concentrations Compared to the EPA's Drinking Water Maximum Contaminant Levels (MCL)

Nuclide	Curies Released	12-Month Average Concentration (pCi/L)		
		Below SRS ^(a)	at BJWSA Purrysburg Plant ^(b)	EPA MCL ^(d)
H-3 ^(c)	7.86E+02	4.81E+02	4.03E+02	2.00E+04
C-14	4.60E-03	8.62E-04	7.23E-04	2.00E+03
Sr-90	2.43E-02	4.56E-03	3.82E-03	8.00E+00
Tc-99	1.30E-02	2.44E-03	2.04E-03	9.00E+02
I-129	1.44E-02	2.70E-03	2.26E-03	1.00E+00
Cs-137	4.68E-02	8.77E-03	7.35E-03	2.00E+02
U-234	6.77E-02	1.27E-02	1.06E-02	1.03E+01
U-235	2.50E-03	4.69E-04	3.93E-04	4.67E-01
U-238	7.55E-02	1.42E-02	1.19E-02	1.00E+01
Np-237	3.21E-07	6.02E-08	5.04E-08	1.50E+01
Pu-238	5.13E-04	9.62E-05	8.06E-05	1.50E+01
Pu-239	1.10E-04	2.06E-05	1.73E-05	1.50E+01
Am-241	1.79E-04	3.36E-05	2.81E-05	1.50E+01
Cm-244	1.21E-04	2.27E-05	1.90E-05	1.50E+01
Alpha	8.60E-03	1.61E-03	1.35E-03	1.50E+01
Beta	9.53E-02	1.79E-02	1.50E-02	8.00E+00

a. Near Savannah River Mile 118.8, downriver of SRS at the U.S. Highway 301 bridge

b. Beaufort-Jasper Water and Sewer Authority, drinking water at the Purrysburg Plant

c. The tritium concentrations and source term are based on actual measurements of the Savannah River water at the various locations. They include contributions from VEGP and the Barnwell Low-Level Disposal Facility. All other radionuclide concentrations are calculated based on the effective or measured river flow rate.

d. MCLs for Uranium based on radioisotope specific activity X 30 µg/L X isotopic abundance

2.1.2.2 Radionuclide Concentrations in Fish

At SRS, an important dose pathway for the representative person is from the consumption of fish. Fish exhibit a high degree of bioaccumulation for certain elements. For cesium (including radioactive isotopes of cesium, such as cesium-137), the bioaccumulation factor for Savannah River fish is 3,000, meaning that the concentration of cesium in fish flesh is about 3,000 times the concentration of cesium found in the water in which the fish live (Carlton et al., 1994).

Because of this high bioaccumulation factor, SRS can detect cesium-137 more easily in fish flesh than in river water. Therefore, when conservative to do so, SRS will base the fish pathway dose from cesium-137 directly on the analysis of the fish collected near RM 118.8, the assumed location of the hypothetical representative person. As shown in Data Table A-10, the 2015 cesium-137 release value of 0.0468 Ci is based on analysis of fish in the river.

2.1.2.3 Dose to the Representative Person

As shown in Data Table A-11, the 2015 dose to the representative person from all liquid pathways, including irrigation, was estimated at 0.15 mrem (0.0015 mSv), which was 25% more than the comparable dose in 2014 of 0.12 mrem (0.0012 mSv). SRS attributes this increase to the 30% decrease in estimated Savannah River flow rate during 2015. Table 2-2 shows that this total dose is 0.15% of the all-pathway public dose standard of 100 mrem/yr (1 mSv/yr).

Table 2-2. Potential Dose to the Representative Person from SRS Liquid Releases in 2015

	Committed Dose (mrem)	Applicable Standard (mrem)	Percent of Standard (%)
Near Site Boundary (All Liquid Pathways)			
All Liquid Pathways Except Irrigation	0.053		
Irrigation Pathways	0.093		
Total Liquid Pathways	0.15	100 ^a	0.15%

^aAll-pathway dose standard: 100 mrem/yr (DOE Order 458.1)

Over 64% of the 2015 total dose to the representative person resulted from consuming meat, milk, and vegetables. The fish consumption pathway accounted for 23%, and the drinking water pathway accounted for 13%. As shown in Figure 2-1, cesium-137 (23%) and unidentified beta emitters (19%) were the major contributors to the total dose. Data Table A-12 provides a five-year history of SRS liquid pathway doses.

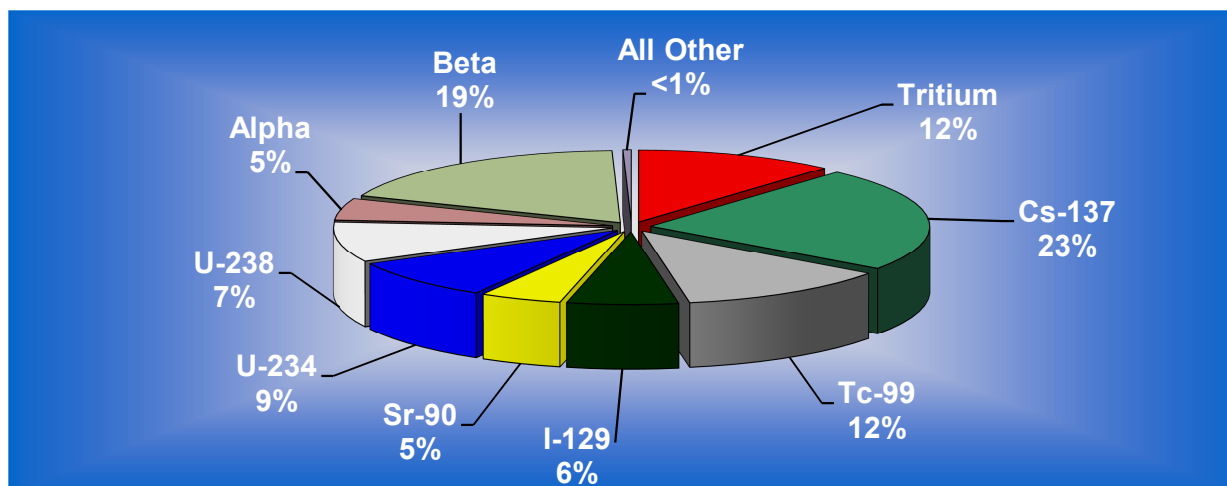


Figure 2-1. Radionuclide Contributions to the 2015 SRS Total Liquid Pathway Dose of 0.15 mrem (0.0015 mSv)

2.1.2.4 Drinking Water Pathway Dose

People living downriver of SRS may receive some dose by consuming drinking water that contains radioactive releases from the Site. Tritium in downriver drinking water represented the highest percentage of the dose (about 49%) received by customers of the three downriver water treatment plants.

As shown in Data Table A-13, the 2015 SRS-only releases were responsible for a maximum potential drinking water dose of 0.016 mrem (0.00016 mSv). This dose is 45% more than the 2014 dose of 0.011 mrem (0.00011 mSv). Again, this increase is mainly attributed to the decrease in the estimated Savannah River flow rate during 2015. There is not a separate drinking water dose standard, but the EPA Maximum Contamination Level (MCL), defined in 40 CFR 141 (EPA 2000), assume a potential dose of approximately 4 mrem/yr for beta and gamma emitters.

2.1.2.5 Collective (Population) Dose

SRS calculates the collective drinking water consumption dose for the separate population groups served by the BJWSA and City of Savannah I&D water treatment plants (Data Table A-14). Calculations of collective doses from agricultural irrigation assume that 1,000 acres of land are used for each of the major food types grown in the SRS area (vegetables, milk, and meat), with the population within 50 miles of SRS consuming all the food produced on these 1,000-acre parcels.

In 2015, the collective dose from all liquid pathways was 2.6 person-rem (0.026 person-Sv) (Data Table A-15). Person-rem is calculated as the dose to a “typical” person multiplied by the number of people exposed. This is 30% more than the comparable 2014 collective dose of 2.0 person-rem (0.020 person-Sv). SRS attributes this increase to the 30% decrease in the estimated Savannah River flow rate during 2015.

2.2 Air Pathway Doses

2.2.1 Atmospheric Source Terms

Data Table A-16 documents the 2015 SRS airborne radiological releases by Site area. Data Table A-17 provides a five-year history of SRS atmospheric releases, and it shows that tritium oxide releases, which account for a majority of the offsite doses, decreased by 30% from 2014 to 2015. Estimates of unmonitored diffuse and fugitive sources were included in the atmospheric source term, as required for demonstrating compliance with EPA regulations.

2.2.2 Atmospheric Concentrations

For dose determinations, SRS uses calculated radionuclide concentrations from standard modeling of measured effluent releases instead of measured concentrations in the air surveillance samples. This is because most radionuclides released from SRS were not detected (using conventional analytical methods) in the air samples collected at the Site perimeter and offsite locations. However, to confirm the dose models, SRS can routinely measure the concentrations of tritium oxide at locations along the site perimeter, then compare these results with the calculated concentrations. In Data Table A-18, this comparison showed that in 2015 the dose models used at SRS were about 1.5 to 2 times more conservative than the actual measured tritium oxide concentrations.

2.2.3 Dose to the Representative Person

As shown in Data Table A-19, the 2015 estimated dose from atmospheric releases to the representative person was 0.032 mrem (0.00032 mSv), 0.32% of the DOE Order 458.1 air pathway standard of 10 mrem per year. Table 2-3 compares the representative person dose with the DOE standard. The 2015 dose was about 27% less than the 2014 dose of 0.044 mrem (0.00044 mSv). SRS attributes this decrease to the 30% decrease in tritium oxide releases during 2015.

Table 2-3. Potential Doses to the Representative Person and to the MEI from SRS Atmospheric Releases in 2015 and Comparison to the Applicable Dose Standard

	MAXDOSE-SR	CAP88-PC (EPA NESHAP)
Calculated dose (mrem)	0.032	0.022
Applicable Standard (mrem)	10 ^a	10 ^b
Percent of Standard (%)	0.32	0.22
^a DOE: DOE Order 458.1		
^b EPA: (NESHAP) 40 CFR 61, Subpart H		

As shown in Figure 2-2, tritium oxide releases accounted for nearly 96% of the dose to the representative person. Iodine-129 accounted for about 2%. No other individual radionuclide accounted for more than 1% of the representative person dose. Data Table A-19 also shows that the major pathways through which a representative person received radioactivity from atmospheric releases were inhalation (38%), vegetable consumption (37%), and cow milk consumption (25%). As shown in Data Table A-20 and in Figure 2-3, the due north sector of the Site was the location of the highest dose to the representative person.

Because of the potential in the SRS vicinity for the consumption of goat milk, additional calculations of the dose to the representative person were performed substituting goat milk for the customary cow milk pathway. As shown in Data Table A-21, SRS estimated that the potential dose to the representative person using the goat milk pathway is 0.036 mrem (0.00036 mSv). SRS provides this dose for reference only.


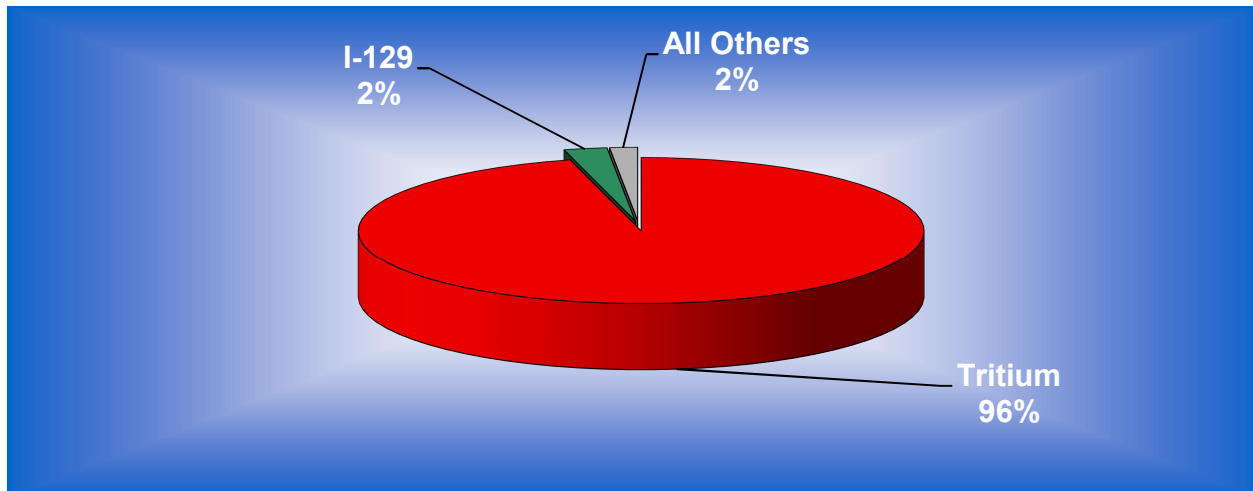


Figure 2-2. Radionuclide Contributions to the 2015 SRS Air Pathway Dose of 0.032 mrem

2.2.4 Collective (Population) Dose

SRS calculates the air-pathway collective dose for the entire 781,060 population living within 50 miles of the center of the Site. Data Table A-4 shows the population distribution around SRS.

In 2015, SRS estimated the airborne-pathway collective dose at 1.1 person-rem (0.011 person-Sv), less than 0.01% of the annual collective dose received from natural sources of radiation (about 234,000 person-rem). Data Table A-22 shows the 2015 air-pathway collective doses by radionuclide and pathway. Tritium oxide releases accounted for 97% of the collective dose.

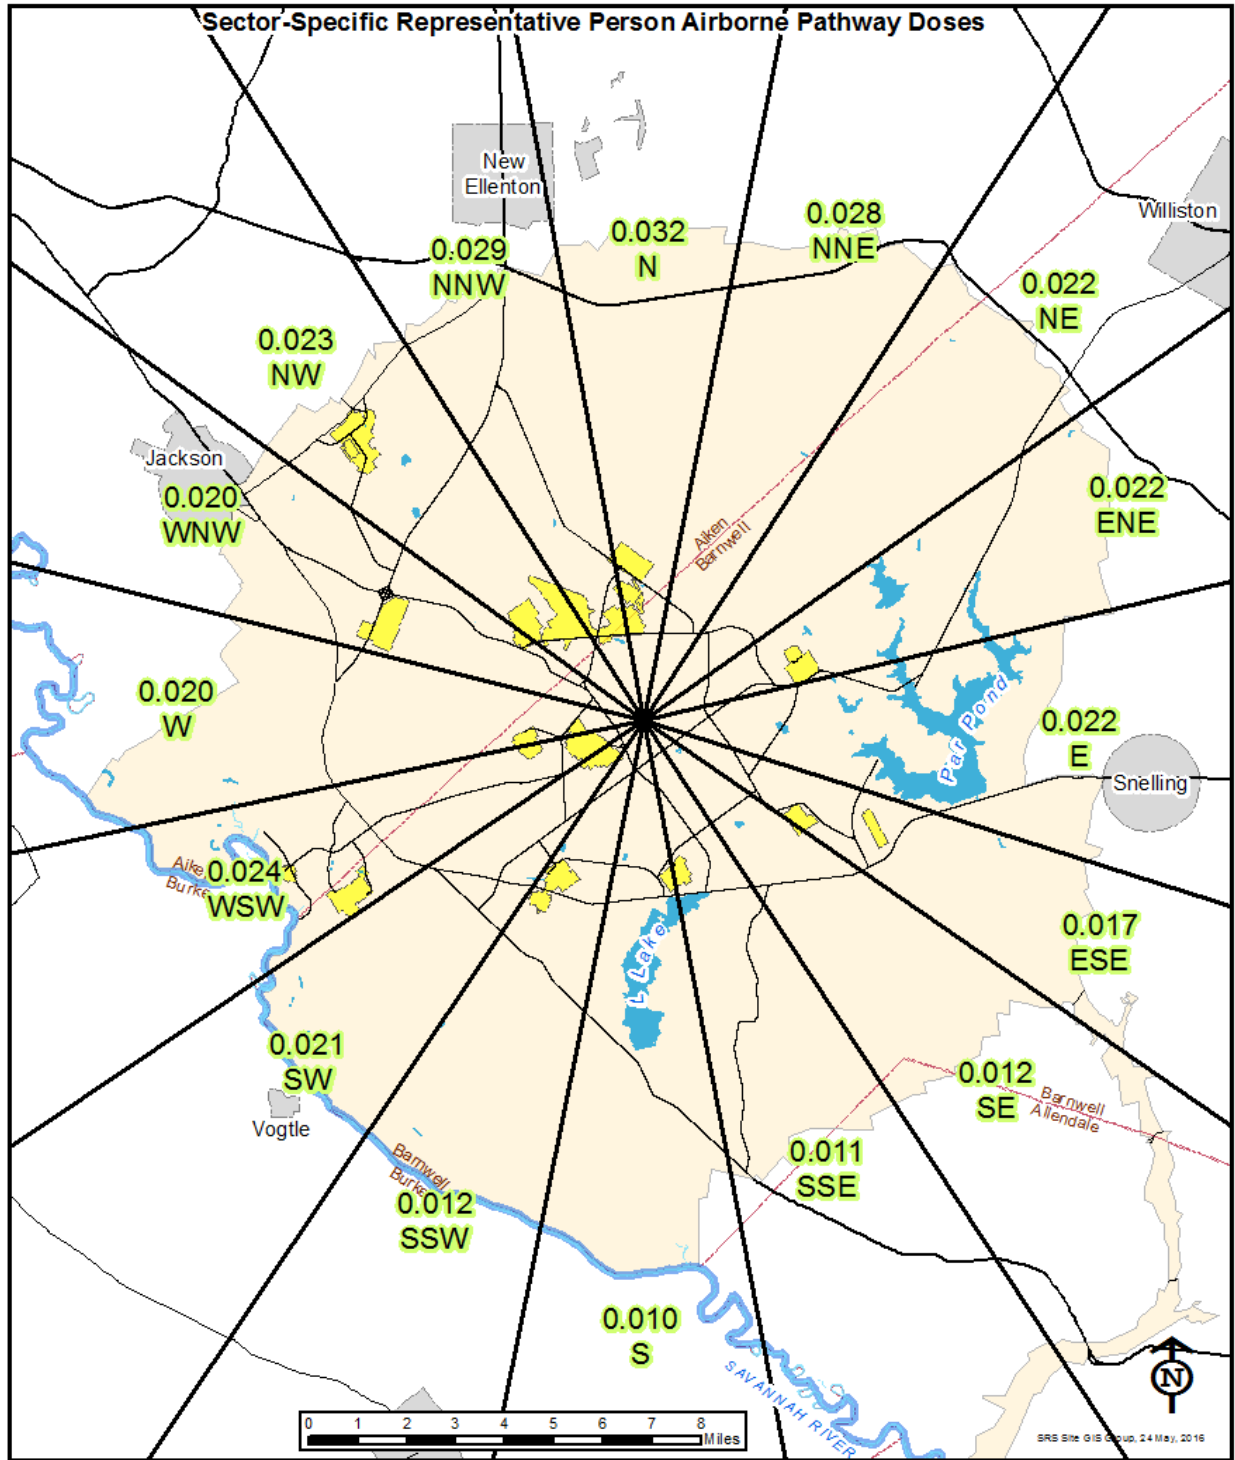

Doses are shown for each of the 16 major compass point directions surrounding SRS.
In 2015, the N sector was the highest at 0.032 mrem

Figure 2-3. Sector-specific Representative Person Site Boundary Doses

2.2.5 National Emission Standards for Hazardous Air Pollutants (NESHAP) Compliance

2.2.5.1 Maximally Exposed Individual Dose

To demonstrate compliance with NESHAP regulations (EPA 2006), SRS calculated Maximally Exposed Individual (MEI) and collective doses using:

- 1) The CAP88 PC version 4.0.1.17 computer code,
- 2) The 2015 airborne-release source term shown in Data Table A-23, and
- 3) Site-specific input parameters shown in Data Table A-24.

The EPA requires the use of the MEI concept and does not allow use of the reference person concept at this time. The EPA specifies most of the input parameters in the CAP88 PC program, and they cannot be changed without specific EPA approval.

For 2015, SRS used CAP88 PC (version 4.0.1.17, dated September 2014) to demonstrate compliance with the EPA's 10 mrem/yr (0.1 mSv/yr) public dose standard for airborne emissions from DOE sites. For 2015, the MEI dose was estimated at 0.022 mrem (0.00022 mSv), or 0.22% of the 10-mrem/yr EPA standard, as shown in Table 2-3.

As shown in Data Table A-25, tritium oxide releases accounted for about 87% of the MEI dose and elemental tritium accounted for 11%. The 2015 NESHAP compliance dose (MEI dose) was about 27% less than the 2014 dose of 0.031 mrem (0.00031 mSv). Again, SRS attributes this decrease to the 30% decrease in tritium oxide releases during 2015.

2.2.5.2 Dose from Diffuse and Fugitive Releases

NESHAP regulations require the separate reporting of dose from diffuse and fugitive releases. Data Table A-26 shows the MEI dose from diffuse and fugitive releases was about 0.0096 mrem (0.000011 mSv) and it accounts for 44% of the total 2015 MEI dose.

2.2.5.3 Collective Dose

The CAP88 PC-determined collective (population) dose for 2015 was estimated at 3.2 person-rem (0.032 person-Sv), which is 26% less than the 2014 collective dose of 4.3 person-rem (0.043 person-Sv). Tritium releases accounted for nearly 98% of the NESHAP collective dose.


Comparisons (by pathway and major radionuclides) of the CAP88 PC-determined MEI and collective doses with the MAXDOSE-SR and POPDOSE-SR representative person doses are provided in Data Table A-27 and Data Table A-28, respectively. As shown in Data Table A-27, the CAP88 PC version 4.0.1.17 code estimates a lower dose for the MEI mainly because of the lower human usage parameters used in the EPA code. However, for the population dose (Data Table A-28), the CAP88 PC version 4.0.1.17 estimates a higher dose, because 1) it assumes the general population has the same inhalation and consumption rates as the maximally exposed individual, and 2) it assumes a one-to-one ratio between tritium oxide in air and tritium oxide in plant leaves (whereas POPDOSE-SR assumes a 50% ratio).

2.3 All-Pathway Dose

As stated in DOE Order 458.1, the all-pathway dose standard is 100 mrem/yr. SRS ensures a conservative estimate, by combining the representative person airborne pathway and liquid pathway dose estimates, even though the two estimated doses are for hypothetical individuals residing at different geographic locations.

For 2015, the potential representative person all-pathway dose was 0.18 mrem (0.0018 mSv), calculated as 0.032 mrem from air pathways plus 0.15 mrem from liquid pathways. The all-pathway dose is 0.18% of the 100 mrem/yr (1 mSv/yr) DOE dose standard. The 2015 all-pathway dose is about 13% more than the 2014 total dose of 0.16 mrem (0.0016 mSv). SRS attributes this increase to the 30% decrease in the estimated Savannah River flow rate during 2015. Data Table A-12 provides a five-year history of the SRS all-pathway doses.

Figure 2-4 shows a ten-year history of SRS's all-pathway (airborne pathways plus liquid pathways) doses to the MEI/representative person.

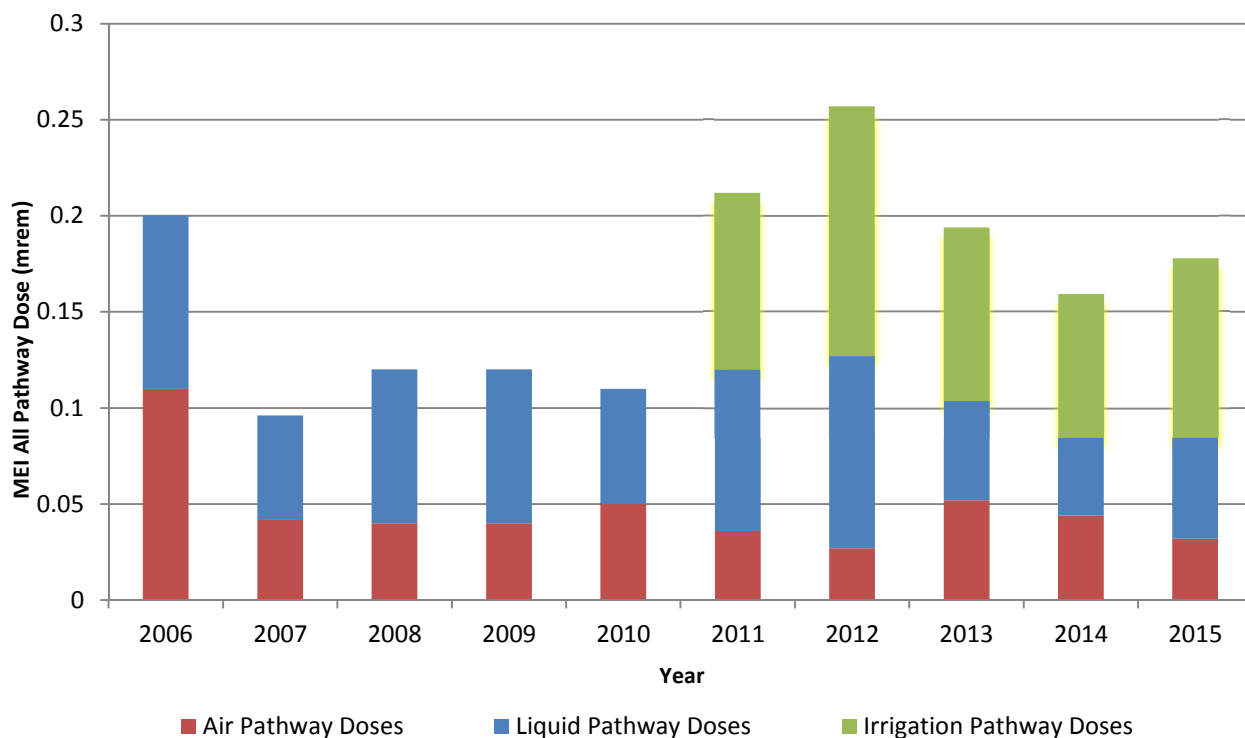

1. Beginning in 2011, the irrigation pathway dose is included in the liquid pathway dose. Previous years do not include the irrigation pathway dose.
2. Beginning in 2012, SRS began using the representative person dose instead of the MEI dose.

Figure 2-4. Ten-Year History of SRS Maximum Potential All-Pathway Doses

2.4 Sportsman Dose

DOE Order 458.1 specifies radiation dose standards for individual members of the public. The dose standard of 100 mrem/yr includes the dose a person receives from routine DOE operations through all exposure pathways. Additionally, SRS considers and quantifies unique exposure pathways that are not included in the standard calculations of the doses to the representative person. This is because they apply to unlikely scenarios, such as eating fish caught only from the mouths of SRS streams (“creek-mouth fish”), or to special scenarios, such as onsite volunteer hunters.

In addition to deer, hog, fish, and turkey consumption, SRS considered the following exposure pathways for an offsite hunter and an offsite fisherman on Creek Plantation, a privately-owned portion of the Savannah River Swamp.

- External exposure to contaminated soil,
- Incidental ingestion of contaminated soil, and
- Incidental inhalation of renewed suspension of contaminated soil.

2.4.1.1 Turkey Consumption Pathway

SRS hosts a special turkey hunt during April for hunters with mobility impairments. Hunters harvested 27 turkeys in 2015. SRS measured all of the turkeys for radiation, but none measured above background. Therefore, no dose was assigned to these hunters.

2.4.2 Hypothetical Offsite Hunter Doses

2.4.2.1 Deer and Hog Consumption Pathway

The deer and hog consumption pathways considered were for hypothetical offsite individuals whose entire intake of meat (81 kg) during the year was either deer or hog meat. SRS assumes these individuals harvested deer or hogs that had resided on SRS during the year, then moved offsite prior to hunting season.

Based on these unlikely assumptions and on the measured average concentration of cesium-137 in all deer (1.71 pCi/g) and hogs (0.91 pCi/g) harvested from SRS during 2015, the potential maximum doses from this pathway were estimated at 4.9 mrem (0.049 mSv) for the offsite deer hunter and 1.7 mrem (0.017 mSv) for the offsite hog hunter. Data Table A-29 documents these dose calculations.

Beginning in 2013, a background cesium-137 concentration of 0.5 pCi/g is now subtracted from the onsite average concentrations, before calculating the offsite hunter doses. Prior to 2013, the background value was 1.0 pCi/g. The 0.5 pCi/g background concentration is based on the median value determined by South Carolina Department of Health and Environmental Control (SCDHEC) for South Carolina deer, from 2008 through 2012 (SCDHEC 2013).

2.4.2.2 Savannah River Swamp Hunter Soil Exposure Pathway

SRS estimated the potential dose to a recreational hunter exposed to SRS legacy contamination on the privately-owned Creek Plantation. SRS assumes that this recreational sportsman hunted for 120 hours during the year (8 hours per day for 15 days) at the location of maximum radionuclide contamination. As shown in Table 2-4, the offsite deer consumption pathway and the Savannah River Swamp hunter soil exposure pathway were conservatively added together to obtain a total offsite hunter dose of 7.8 mrem (0.078 mSv). This potential dose is 7.8% of the DOE 100 mrem/yr all-pathway dose standard.

Table 2-4. 2015 Representative Person All-Pathways and Sportsman Doses Compared to the DOE All-Pathways Dose Standard

	Committed Dose (mrem)	Applicable Standard (mrem) ^a	Percent of Standard (%)
Representative Person Dose			
All-Pathways (Liquid Plus Airborne Pathways)	0.18	100	0.18
Sportsman Dose			
Onsite Hunter	12.9	100	12.9
Creek-Mouth Fisherman ^b	0.28	100	0.28
Savannah River Swamp Hunter			
Offsite Hog Consumption	1.67		
Offsite Deer Consumption	4.93		
Soil Exposure ^c	2.90		
Total Offsite Deer Hunter Dose	7.83	100	7.83
Savannah River Swamp Fisherman			
Steel Creek Fish Consumption	0.28		
Soil Exposure ^d	0.67		
Total Offsite Fisherman Dose	0.95	100	0.95

^a All-pathway dose standard; 100 mrem/yr (DOE Order 458.1)

^b In 2015, the maximum dose to a hypothetical fisherman resulted from the consumption of bass from the mouth of Lower Three Runs

^c Includes the dose from a combination of external exposure to and incidental ingestion and inhalation of the worst-case Savannah River swamp soil

^d Includes the dose from a combination of external exposure and incidental ingestion and inhalation of Savannah River swamp soil near the mouth of Steel Creek

2.4.3 Hypothetical Offsite Fisherman Dose and Risk

2.4.3.1 Creek-Mouth Fish Consumption Pathway

For 2015, analyses were conducted on three species of fish (panfish, catfish, and bass) taken from the mouths of four SRS streams. Using these concentrations, SRS estimated the maximum potential dose from fish consumption at 0.28 mrem (0.0028 mSv) from bass collected at the mouth of Lower Three Runs. SRS bases this hypothetical dose on the low-probability scenario that, during 2015, a fisherman consumed 24 kg (53 lb) of bass caught exclusively from the mouth of Lower Three Runs. About 65% of this potential dose was from cesium-137.

2.4.3.2 Savannah River Swamp Fisherman Soil Exposure Pathway

Using the RESRAD code (Yu et al., 2001), SRS calculated the potential dose to a recreational fisherman exposed to SRS legacy contamination in Savannah River Swamp soil on the privately-owned Creek Plantation. SRS assumes that this recreational sportsman fished on the South Carolina bank of the Savannah River, near the mouth of Steel Creek, for 250 hours during the year.

Using the radionuclide concentrations measured at this location, SRS estimated the potential dose to a fisherman from a combination of 1) external exposure to the contaminated soil, 2) incidental ingestion of the soil, and 3) incidental inhalation of renewed suspension soil to be 0.67 mrem (0.0067 mSv). Data Table A-30a and Data Table A-30b, respectively, show the measured concentrations and resulting doses for each location and species combination.

As shown in Table 2-4, the maximum Steel Creek fish consumption dose (0.28 mrem) and the Savannah River Swamp fisherman soil exposure pathway were conservatively added together to obtain a total offsite fisherman dose of 0.95 mrem (0.0095 mSv). This potential dose is 0.95% of the DOE 100 mrem/yr all-pathway dose standard.

2.4.3.3 Potential Risk from Consumption of SRS Creek-Mouth Fish

During 1991 and 1992, in response to a U.S. House of Representatives Appropriations Committee request for a plan to evaluate risk to the public from fish collected from the Savannah River, SRS developed a fish monitoring plan in conjunction with the EPA, the Georgia Department of Natural Resources (GDNr), and SCDHEC. This plan ensures the assessment of radiological risk from the consumption of Savannah River fish, and requires that SRS present a summary of the results in the Annual SRS Environmental Report.

2.4.3.3.1 Risk Comparisons

For 2015, the maximum potential radiation doses and lifetime fatal and non-fatal cancer risks (from the consumption of SRS creek-mouth fish for 1-year, 30-year, and 50-year exposure durations) are compared to the radiation risks associated with the DOE Order 458.1 all-pathway dose standard of 100 mrem/yr (1.0 mSv/yr) in Table 2-5. SRS estimated the potential risks using the cancer morbidity risk coefficients from Federal Guidance Report No. 13 (EPA, 1999). The assumed maximum fish consumption rate is 24 kg per year (Table 1-1).

Table 2-5. Potential Lifetime Risks from the Consumption of Savannah River Fish Compared to Dose Standards

	Committed Dose (mrem)	Potential Risk ^a
2015 Savannah River Fish		
1-Year Exposure	0.28	1.9E-07
30-Year Exposure	8.4	5.6E-06
50-Year Exposure	14.0	9.3E-06
Dose Standard		
100 mrem/yr All Pathway	100	7.3E-05
1-Year Exposure	3,000	2.2E-03
30-Year Exposure	5,000	3.7E-03
50-Year Exposure		

^a All radiological risk factors are based on observed and documented health effects to actual people who have received high doses (more than 10,000 mrem) of radiation, such as the Japanese atomic bomb survivors. Radiological risks at low doses (less than 10,000 mrem) are theoretical and are estimated by extrapolating the observed health effects at high doses to the low-dose region by using a linear, no-threshold model. However, cancer and other health effects have not been observed consistently at low radiation doses because the health risks either do not exist or are so low that they are undetectable by current scientific methods.

In 2015, the maximum dose and risk to a hypothetical fisherman resulted from the consumption of bass from the mouth of Lower Three Runs (Data Table A-30b and Data Table A-30c). Figure 2-5 shows the history (1992-2015) of the annual potential radiation doses from consumption of Savannah River fish.

Over the past ten years, there are no apparent trends in these data. This is because of the relatively large variability in the radionuclide concentrations measured in fish from the same location, due to differences in the following:

- Size of the fish collected each year,
- Mobility and location within the stream mouth from which they are collected,
- Time of year they are collected,
- Amount of radionuclides in the stream water and sediments in which they live that are chemically and physically available to the fish,
- Water quality at each SRS stream mouth, caused by annual changes in stream flow rates (turbulence) and water chemistry.

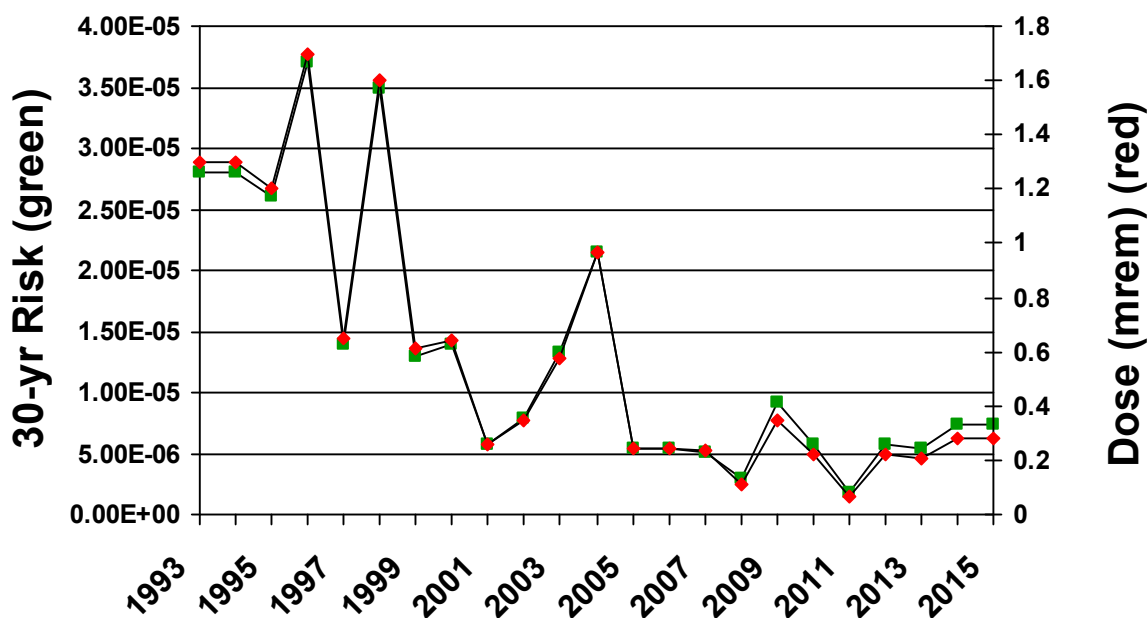


Figure 2-5. History of SRS Maximum Potential Fisherman Doses and 30-y Projected Risks

As indicated in Table 2-5, the 50-year maximum potential lifetime risk from consumption of SRS creek-mouth fish was 9.3E-06, well below the 50-year risk (3.7E-03) associated with the 100 mrem/yr dose standard.

If a potential lifetime risk is less than 1.0E-06 (i.e., one additional case of cancer over that expected in a group of 1,000,000 people), the risk is considered minimal and the corresponding contaminant concentrations are considered negligible. If a calculated risk is more than 1.0E-04 (one additional case of cancer in a population of 10,000), some form of corrective action or remediation may be required. However, if a calculated risk falls between 1.0E-04 and 1.0E-06 (the case with the maximum potential lifetime risks from the consumption of Savannah River fish), then the risk may be deemed acceptable, if it is kept 'as low as reasonably achievable' (ALARA). At SRS, an environmental ALARA program (3Q 18.5) is in place, to ensure that the potential doses and risks from Site radioactive liquid effluents (and, therefore, from consumption of Savannah River fish) is kept ALARA (SRS, 2015).

3.0 Release of Material Containing Residual Radioactivity

DOE Order 458.1 provides for the establishment of authorized surface contamination limits, which in turn allow unconditional release of personal and real property. This order defines personal property as, *“property of any kind, except for real property” and defines real property as “land and anything permanently affixed to the land such as buildings, fences and those things attached to the buildings, such as light fixtures, plumbing and heating fixtures, or other such items, that would be personal property if not attached.”* SRS handles unconditional release of real property on a case-by-case basis, which requires specific approval from the DOE. SRS did not release any real property in 2015, so the following discussion is associated with release of personal property from SRS. DOE Order 458.1 specifies that an annual summary of cleared property must be prepared and submitted to the Field Element Manager (i.e., DOE-SR Manager).

3.1 Property Release Methodology

Through use of procedures, SRS governs the unconditional release of equipment and material. Following a radiological survey, SRS can unconditionally release an item, if it meets specific documented limits. For items meeting unconditional release criteria, SRS generates a form and electronically attaches it to the applicable radiological survey, via the Visual Survey Data System. To determine the amount of material and equipment released from SRS facilities in 2015, SRS subsequently compiled these electronic forms and coordinated a sitewide review. These measures ensure that radiological releases of material from SRS are consistent with the requirements of DOE Order 458.1.

In 2015, SRS unconditionally released a total of 10,124 items of personal property from radiological areas. Most of these items did not leave the Site. However, all of these items required no additional radiological controls, post-survey, as they met DOE Order 458.1 release criteria. The recently implemented DOE Order 458.1 allows the use of DOE Order 5400.5 derived supplemental limits for unconditional release of equipment and materials.

In 2003, the DOE approved an SRS request to use supplemental limits for releasing material from the Site, with no further DOE controls. These supplemental release limits, provided in Data Table A-31, are dose-based. These limits are such, that if any member of the public received any exposure, it would be less than 1 mrem/yr. The supplemental limits include both surface and volume concentration criteria. The surface criteria are very similar to those used in previous years. The volume criteria allow SRS the option to dispose of potentially volume-contaminated material in Three Rivers Landfill, an onsite sanitary waste facility. In 2015, SRS did not release any material from the Site using the supplemental release limits volume concentration criteria.

4.0 Radiation Dose to Aquatic and Terrestrial Biota

DOE Order 458.1 requires that SRS conduct Site operations in a manner that protects the local biota from adverse effects due to radiation and radioactive material releases. To demonstrate compliance with this requirement, SRS uses the approved DOE Standard, DOE-STD-1153-2002, *A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota* (DOE 2002).

The biota dose rate limits specified in this standard are:

- Aquatic Animals 1.0 rad/day (0.01 gray/day),
- Riparian Animals 0.1 rad/day (0.001 gray/day),
- Terrestrial Plants 1.0 rad/day (0.01 gray/day), and
- Terrestrial Animals 0.1 rad/day (0.001 gray/day).

4.1 DOE Biota Concentration Guides

SRS conducts evaluations of biota doses for aquatic and terrestrial systems using the RESRAD Biota model (version 1.5) (SRS EDAM 2015), which directly implements the DOE (2002) guidance.

For aquatic systems (aquatic and riparian animals), the RESRAD Biota model performs a combined water-plus-sediment evaluation. SRS performed initial screenings in 2015 using maximum radionuclide concentration data from the 13 SRS environmental monitoring stream and sediment sampling locations that are co-located. These screenings determine the biota concentration guide (BCG) sum of the fractions for each of the 13 assessed aquatic systems. A sum of the fractions less than 1.0 indicates the sampling site has passed its initial pathway screening. This means that the biota dose rate limits were not exceeded, and that no further assessments are needed.

Data Table A-32 presents the results of the 2015 biota dose assessment. As shown, all aquatic system locations passed the initial screening and no further assessments were required.

For the terrestrial systems evaluation (terrestrial plants and animals), SRS performed initial screenings using concentration data from the five onsite radiological soil sampling locations. Typically, SRS collects and analyzes only one soil sample per year from each location. For 2015, all terrestrial locations passed their initial pathway screenings (Data Table A-32).

5.0 References

- Carlton, W.H., C.E. Murphy, Jr., and A.G. Evans. "Radiocesium in the Savannah River Site Environment," *Health Physics*, Volume 67, Number 3, Williams & Wilkins, Baltimore, MD; 1994.
- International Commission on Radiological Protection. Age dependent doses to members of the public from intake of radionuclides: part 5 compilation of ingestion and inhalation dose coefficients. Oxford: ICRP; Publication 72, Ann. 26(1); 1996.
- International Commission on Radiological Protection. Basic anatomical and physiological data for use in radiological protection reference values. Oxford: ICRP; Publication 89, Ann. ICRP 32 (3-4); 2002.
- International Commission on Radiological Protection. Assessing dose of the representative person for the purpose of radiation protection of the public. Oxford: ICRP; Publication 101, Ann. ICRP 36 (No. 3); 2006.
- Jannik, G.T., B. Stagich, L. Hartman. "Land and Water Use Characteristics and Human Health Input Parameters for Use in Environmental Dosimetry and Risk Assessments at the Savannah River Site - 2016 Update," SRNL-STI-2016-00456, Savannah River National Laboratory, Savannah River Site, Aiken, SC; 2016.
- Savannah River National Laboratory. "Environmental Dose Assessment Manual," SRNL-TR-2010-00274, Revision 1, Savannah River National Laboratory, Aiken, SC; 2012.
- Savannah River Site, "Savannah River Site Environmental Monitoring Program Management Plan," SRS Manual 3Q1-101, Revision 7, Savannah River Site, Aiken, SC; 2015.
- South Carolina Department of Health and Environmental Control. "Environmental Surveillance and Oversight Program, 2012 Data Report," CR-004111, 2013, Columbia, SC; 2013.
- Stone, D. K., Jannik, G. T. Site Specific Reference Person Parameters and Derived Concentration Standards for the Savannah River Site. SRNL-STI-2013-00115. Savannah River National Laboratory. Aiken, SC: 2013.
- U.S. Department of Energy. "External and Internal Dose Conversion Factors for Calculation of Dose to the Public", DOE/EH-0070 & 71, Washington, D.C., 1988
- U.S. Department of Energy. "A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota," DOE Standard, DOE-STD-1153-2002, July 2002, Washington, DC; 2002.
- U.S. Department of Energy. "DOE Derived Concentration Technical Standard," DOE-STD-1196-2011, Washington, DC; 2011.
- U.S. Department Of Energy. Radiation protection of the public and the environment, Change #3, Washington, DC: U.S. DOE O 458.1; 2013.
- U.S. Environmental Protection Agency. "External Exposure to Radionuclides in Air, Water, and Soil," Federal Guidance Report No. 12, USEPA 402-R-93-081, Washington, DC; 1993.
- U.S. Environmental Protection Agency. "Cancer Risk Coefficients for Environmental Exposure to Radionuclides," Federal Guidance Report No.13, USEPA 402-R-99-001, September 1999, Washington, DC; 1999.
- U.S. Environmental Protection Agency. "National Primary Drinking Water Regulations," Title 40 Code of Federal Regulations, Part 141, December 2000, Washington, DC; 2000.
- U.S. Environmental Protection Agency. Exposure factors handbook. Washington, DC: U.S. Environmental Protection Agency; EPA/600/R-90/052F; 2011.

- U.S. Environmental Protection Agency (EPA). "National Emissions Standards for Hazardous Air Pollutants; Radionuclides," Title 40 Code of the Federal Regulations, Part 61, Washington, D.C. 2006.
- U.S. Nuclear Regulatory Commission. "Regulatory Guide 1.109 - Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Evaluating Compliance with 10 CFR 50, Appendix I," Revision 1, Washington, DC; 1977.
- Viner, B.J., "Summary of Data and Steps for Processing the 2007-2011 SRS Meteorological Database," SRNL-STI-2013-00268, Savannah River National Laboratory, Aiken, SC, 2013.
- Yu, C., A.J. Zielen, J.J. Cheng, D.J. LePoire, E. Gnanapragasam, S. Kamboj, Amish, A. Wallo III, W.A. Williams, and H. Peterson, "User's Manual for RESRAD," Version 6, Environmental Assessment Division, Argonne National Laboratory, July 2001, Argonne, IL; 2001.

Appendix A

Data Table A-1. Parameters Used for Liquid Pathway Dose Calculations

Data Table A-1, Parameters Used for Liquid Pathway Dose Calculations

2 Pages

Reference and Typical Person Consumption and Usage Rates

(Note: Values developed by Savannah River National Laboratory for SRS in Stone and Jannik, 2013)

Pathway	Reference Person 95th percentile	Typical Person 50th percentile	Units
Fish consumption	24	3.7	kg/y
Marine invertebrates	Not applicable	1.5	kg/y
Boating	44	3,110,000	h/y (person-h/y)
Swimming	14	295,000	h/y (person-h/y)
Shoreline recreation	20	822,000	h/y (person-h/y)
Water consumption	800	300	L/y

Population Served by Downriver Water Treatment Plants

Beaufort-Jasper Purrysburg Plant	64,200	persons
Beaufort-Jasper Chelsea Plant	82,900	persons
City of Savannah Industrial & Domestic Water Supply	35,000	persons

50-mile Population

2010 US Census	781,060	persons
----------------	---------	---------

Site-Specific Parameters Used in Liquid Dose Calculations

	Value	Units
Savannah River <i>effective</i> flow rate at Hwy 301 for 2015 ^(a)	5,972	ft ³ /s
River dilution in estuary	3	
Transport Time		
Recreation	1	d
Drinking Water	1.5	d
Fish	2	d
Treatment Plant Drinking Water	4	d
Sport Fish	10	d
Commercial Fish	13	d
Salt Water Invertebrate	13	d
Edible aquatic food harvest		
Fish - sport	8,220	person-kg/y
Fish - commercial	57,000	person-kg/y
Invertebrates - salt water	380,000	person-kg/y
Shoreline width factor	0.2	
Fish bioaccumulation factor for cesium	3,000	

a) The effective river flow rate was based on tritium concentration measurements.

The 2015 measured river flow rate was 8,869 cfs. See Data Table A-6 for details.

Data Table A-1. Parameters Used for Liquid Pathway Dose Calculations

2 Pages

Irrigation Parameter Values:

Parameter	Value	Units	Comments
Irrigated land area:	1000	acres	
Pop dose determined by:	area		POP or AREA equals LT flow rate
Savannah River flow rate:	5,972	cu.ft/sec	
River transit time:	2	d	
Irrigation rate:	3.6	L/sq.m/d	102 L/sq.m/mo
Weathering removal constant:	0.0495	1/d	14 d half-life
Crop exposure time:	70	d	
Grass exposure time:	30	d	
Buildup time in soil:	21,900	d	SRS lifetime
Vegetable crop yield:	2.2	kg/sq.m	
Pasture grass yield:	0.7	kg/sq.m	
Surface density of soil:	240	kg/sq.m	
Pasture grass hold-up time:	0	d	
Veg transport time (individual):	1	d	
Veg transport time (population):	6	d	
Milk transport time:	3	d	
Meat transport time:	6	d	
Fraction of fodder from irrigated field:	1		
Cattle consumption rate of fodder:	36	kg/d	beef
	52	kg/d	milk
Fraction of water from Savannah River:	1		
Cattle consumption rate of water:	28	L/d	beef
	50	L/d	milk
Reference Person (95th percentile)	289	kg/yr	veg
	31	kg/yr	leafy
	81	kg/yr	meat
	260	L/yr	milk
Typical Person (50th percentile)	89	kg/yr	veg
	11	kg/yr	leafy
	32	kg/yr	meat
	69	L/yr	milk
Total Production:	4.25E+06	kg/yr	veg
	1.06E+06	kg/yr	leafy
	4.05E+04	kg/yr	meat
	1.38E+06	L/yr	milk
Fractional retention on leaves:	0.25		all nuclides

Data Table A-2. Site-Specific Parameters Used for Airborne Pathway Doses

Data Table A-2, Site-Specific Parameters Used for Airborne Pathway Doses

	Reference Person 95th Percentile (Individual)	SRS MEI Pre-2012 Adult Individual	Percent Difference	Typical Person 50th Percentile (Population)	SRS Population Pre-2012 Average Adult	Percent Difference
Pathway						
Fruits, vegetables, and grains (kg/yr)	289	276	↑4.7%	89	163	↓45.4%
Leafy vegetables (kg/yr)	31	43	↓27.9%	11	21	↓47.6%
Milk (L/yr)	260	230	↑13%	69	120	↓42.3%
Meat (beef) (kg/yr)	81	81	0.00%	32	43	↓26.3%
Inhalation (m ³ /yr)	6,400	8,000	↓20.0%	5,000	5,548	↓9.9%
50-mile Population						
2010 US Census (persons)	781,060					
Release Locations for Representative Person Dose						
	Reactors	F & H	SRNL	Diffuse and Fugitive		
Release height, m	40	61	31	0		
Release location (site coordinates)						
East	40740	63380	51860	58000		
North	54130	71900	106670	62000		

Data Table A-3. Meteorological Data (2007-2011)

Data Table A-3, Meteorological Data (2007-2011)

1 of 7

Direction is from which the wind blows

43824 WIND STATS H_AREA 60MIN 62M 07-11 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class A

Extremely Unstable Conditions

UMAX(M/S)	N	NNE	NE	ENE	E	ESE	SE	SSE
2.00	0.170	0.160	0.140	0.144	0.147	0.140	0.151	0.138
4.00	0.199	0.252	0.296	0.403	0.447	0.342	0.261	0.241
6.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.370	0.410	0.440	0.550	0.590	0.480	0.410	0.380

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class A

Extremely Unstable Conditions

UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.131	0.135	0.158	0.202	0.202	0.220	0.147	0.158	2.542
4.00	0.335	0.337	0.433	0.660	0.729	0.392	0.252	0.227	5.806
6.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.470	0.470	0.590	0.860	0.930	0.610	0.400	0.390	8.350

Data Table A-3. Meteorological Data (2007-2011)

2 of 7

Direction is from which the wind blows

43824 WIND STATS H_AREA 60MIN 62M 07-11 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class B

Moderately Unstable Conditions

UMAX(M/S)	N	NNE	NE	ENE	E	ESE	SE	SSE
2.00	0.025	0.034	0.041	0.025	0.046	0.037	0.032	0.032
4.00	0.151	0.163	0.282	0.488	0.424	0.316	0.218	0.105
6.00	0.011	0.011	0.062	0.080	0.066	0.046	0.011	0.002
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.190	0.210	0.390	0.590	0.540	0.400	0.260	0.140

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class B

Moderately Unstable Conditions

UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.005	0.028	0.034	0.046	0.032	0.062	0.037	0.032	0.548
4.00	0.197	0.261	0.376	0.695	0.582	0.397	0.135	0.138	4.928
6.00	0.030	0.037	0.053	0.105	0.133	0.064	0.028	0.009	0.750
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.230	0.330	0.460	0.850	0.750	0.520	0.200	0.180	6.230

Data Table A-3. Meteorological Data (2007-2011)

3 of 7

Direction is from which the wind blows

43824 WIND STATS H_AREA 60MIN 62M 07-11 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class C

Slightly Unstable Conditions

UMAX(M/S)	N	NNE	NE	ENE	E	ESE	SE	SSE
2.00	0.064	0.064	0.108	0.087	0.089	0.064	0.055	0.048
4.00	0.202	0.323	0.722	0.745	0.566	0.406	0.300	0.179
6.00	0.138	0.229	0.791	0.697	0.369	0.183	0.172	0.117
8.00	0.048	0.057	0.117	0.073	0.011	0.005	0.018	0.048
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.450	0.670	1.740	1.600	1.040	0.660	0.550	0.390

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class C

Slightly Unstable Conditions

UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.062	0.034	0.060	0.096	0.078	0.062	0.062	0.055	1.089
4.00	0.403	0.463	0.575	0.882	0.555	0.509	0.238	0.181	7.250
6.00	0.328	0.436	0.623	1.029	0.933	0.752	0.266	0.110	7.172
8.00	0.050	0.057	0.115	0.206	0.277	0.238	0.048	0.014	1.384
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.840	0.990	1.370	2.210	1.840	1.560	0.610	0.360	16.900

Data Table A-3. Meteorological Data (2007-2011)

4 of 7

Direction is from which the wind blows

43824 WIND STATS H_AREA 60MIN 62M 07-11 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class D

Neutral Conditions								
UMAX(M/S)	N	NNE	NE	ENE	E	ESE	SE	SSE
2.00	0.108	0.142	0.215	0.204	0.121	0.119	0.131	0.131
4.00	0.431	0.731	1.563	1.295	0.995	0.798	0.653	0.665
6.00	0.367	0.591	1.057	0.614	0.532	0.419	0.656	1.364
8.00	0.101	0.115	0.048	0.028	0.018	0.025	0.025	0.215
12.00	0.018	0.016	0.000	0.002	0.000	0.000	0.005	0.023
14.10	0.000	0.000	0.000	0.000	0.002	0.000	0.000	0.000
TOTAL	1.020	1.600	2.880	2.140	1.670	1.360	1.470	2.400

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class D

Neutral Conditions									
UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.160	0.167	0.144	0.117	0.165	0.131	0.133	0.138	2.774
4.00	1.300	1.169	1.389	1.389	1.213	1.015	0.692	0.488	17.725
6.00	1.937	1.116	1.187	1.249	1.217	1.238	0.486	0.273	15.445
8.00	0.293	0.355	0.257	0.289	0.433	0.546	0.121	0.037	3.044
12.00	0.053	0.032	0.032	0.121	0.183	0.241	0.032	0.005	0.791
14.10	0.000	0.000	0.000	0.000	0.002	0.000	0.000	0.000	0.005
TOTAL	3.740	2.840	3.010	3.170	3.210	3.170	1.460	0.940	39.780

Data Table A-3. Meteorological Data (2007-2011)

5 of 7

Direction is from which the wind blows

43824 WIND STATS H_AREA 60MIN 62M 07-11 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class E

Slightly Stable Conditions

UMAX(M/S)	N	NNE	NE	ENE	E	ESE	SE	SSE
2.00	0.048	0.041	0.066	0.055	0.085	0.057	0.080	0.050
4.00	0.193	0.270	0.706	0.653	0.546	0.626	0.635	0.672
6.00	0.248	0.342	0.257	0.442	0.523	0.415	0.470	0.740
8.00	0.002	0.000	0.000	0.000	0.000	0.002	0.000	0.005
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.490	0.650	1.030	1.150	1.150	1.100	1.190	1.470

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class E

Slightly Stable Conditions

UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.066	0.055	0.057	0.073	0.062	0.066	0.053	0.048	0.965
4.00	0.795	0.853	0.678	0.587	0.630	0.486	0.403	0.332	9.065
6.00	1.277	0.983	0.972	0.814	0.628	0.436	0.215	0.083	8.843
8.00	0.011	0.011	0.007	0.000	0.000	0.000	0.000	0.000	0.039
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	2.150	1.900	1.710	1.470	1.320	0.990	0.670	0.460	18.910

Data Table A-3. Meteorological Data (2007-2011)

6 of 7

Direction is from which the wind blows

43824 WIND STATS H_AREA 60MIN 62M 07-11 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class F

Moderately Stable Conditions

UMAX(M/S)	N	NNE	NE	ENE	E	ESE	SE	SSE
2.00	0.064	0.048	0.092	0.066	0.046	0.066	0.055	0.089
4.00	0.309	0.346	0.465	0.213	0.176	0.254	0.332	0.497
6.00	0.163	0.319	0.094	0.030	0.025	0.080	0.135	0.167
8.00	0.000	0.005	0.000	0.000	0.000	0.000	0.000	0.000
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.540	0.720	0.650	0.310	0.250	0.400	0.520	0.750

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class F

Moderately Stable Conditions

UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.105	0.103	0.092	0.069	0.071	0.083	0.069	0.092	1.210
4.00	0.536	0.607	0.474	0.433	0.328	0.303	0.339	0.328	5.944
6.00	0.309	0.438	0.232	0.257	0.140	0.138	0.066	0.083	2.675
8.00	0.000	0.002	0.000	0.000	0.000	0.000	0.000	0.000	0.007
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.950	1.150	0.800	0.760	0.540	0.520	0.470	0.500	9.840

Data Table A-3. Meteorological Data (2007-2011)

7 of 7

Direction is from which the wind blows

43824 WIND STATS H_AREA 60MIN 62M 07-11 STABILITY FROM SIGMA E

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class G

Extremely Stable Conditions

UMAX(M/S)	N	NNE	NE	ENE	E	ESE	SE	SSE
2.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Joint Frequency Distribution of Wind Speed and Direction:

Atmospheric Stability Class G

Extremely Stable Conditions

UMAX(M/S)	S	SSW	SW	WSW	W	WNW	NW	NNW	TOTAL
2.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14.10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
TOTAL	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Data Table A-4. Population Distribution Around SRS (2010 Census)

Data Table A-4, Population Distribution Around SRS (2010 Census)

Dir(Miles)	5-10	10-20	20-30	30-40	40-50	TOTAL
N	29	9561	13784	4919	12842	41135
NNE	0	3572	2756	7035	32199	45562
NE	0	4791	2835	6128	18663	32417
ENE	16	1919	4524	5598	47214	59271
E	57	8029	7260	7301	4361	27008
ESE	26	2366	1371	1723	3048	8534
SE	10	536	6513	6300	9595	22954
SSE	5	122	242	431	5251	6051
S	0	306	1206	7932	3871	13315
SSW	0	1119	2149	5416	3472	12156
SW	4	1052	1634	1026	1871	5587
WSW	53	1310	10111	1226	5732	18432
W	1	3245	9710	4818	7206	24980
WNW	360	2598	115475	87020	17035	222488
NW	222	8478	93847	56513	3194	162254
NNW	449	28925	30971	10834	7737	78916
Total	1232	77929	304388	214220	183291	781060

**For a 50-mile (80-km) radius around SRS*

Data Table A-5. Savannah River Mile 118.8 Flow Rates, 1954-2014

Data Table A-5, Savannah River Mile 118.8 Flow Rates, 1954-2014

Year	Mean Annual Flow (cfs)	Year	Mean Annual Flow (cfs)
1954	7,382	1990	11,858
1955	5,974	1991	11,598
1956	6,309	1992	11,697
1957	8,312	1993	14,788
1958	11,038	1994	12,271
1959	9,748	1995	12,750
1960	13,112	1996	11,467
1961	10,909	1997	10,464
1962	10,580	1998	16,239
1963	11,138	1999	6,160
1964	20,497	2000	5,550
1965	12,785	2001	5,804
1966	11,175	2002	5,386
1967	10,573	2003	12,842
1968	9,624	2004	8,778
1969	10,945	2005	11,935
1970	7,169	2006	6,818
1971	10,715	2007	6,088
1972	11,275	2008	4,833
1973	14,536	2009	7,666
1974	11,138	2010	9,893
1975	15,533	2011	5,714
1976	14,008	2012	4,570
1977	11,695	2013	8,479
1978	10,547	2014	9,440
1979	13,333	2015	8,833
1980	13,282	Mean =	9,995
1981	6,544	Harmonic Mean =	8933
1982	7,169	Geometric Mean =	9467
1983	12,348		
1984	12,759		
1985	7,167		
1986	6,175		
1987	8,955		
1988	5,364		
1989	7,966		

(USGS #02197500)
Near River Mile 118.8 (Hwy 301 Bridge)

Data Table A-6. Calculated Effective River Flow Rates

Data Table A-6, Calculated Effective River Flow Rates

Savannah River Monthly Flow Rate
Based on USGS Daily Flow Rate
Average is Monthly Average

	Flow, cfs
Month	River Mile 118.8 (Hwy 301)
January	6,220
February	6,393
March	7,978
April	7,771
May	6,583
June	6,990
July	6,431
August	6,414
September	5,872
October	7,403
November	18,258
December	19,082
Average	8,783

Savannah River Annual Flow Rate
Annual Average Based on
USGS Daily Flow Rate

Year	River Mile 118.8
	cfs
2006	6,818
2007	6,088
2008	4,833
2009	7,666
2010	9,893
2011	5,714
2012	4,570
2013	8,479
2014	9,440
2015	8,833
10-y Average	7,233

NOTE:

The annual measured river flow rate shown in the tables above is not used in the dose calculations unless the calculated "effective" river flow rate is higher.

River Flow Rate Adjustment Based on Tritium Measurements

Total Tritium Released to the Savannah River: **2,565** Curies
(786 Ci from SRS, 70 Ci from the Barnwell Low-Level Disposal Facility, and 1,709 Ci from Plant Vogtle)

Location	Finished Water Meas. Conc. pCi/ml	Calculated Total Flow ml	Effective Flow Rate cfs
River Mile 118.8 - calc ^(a,b)	0.481	5.33E+15	5,972
Beaufort-Jasper/Purrysburg - calc ^(a,b)	0.403	6.36E+15	7,127
Beaufort-Jasper/Chelsea - calc ^(a,b)	N/A	N/A	7,127
Savannah I&D - calc ^(a,b)	N/A	N/A	7,127
Estuary (1.1 x River Mile 118.8 Effective Flow Rate) ^c			6,569

a) Total flow calculated on basis of releases of tritium and measured tritium concentrations in the river using the following equation: Total flow, ml=(Q,Ci)(1.0E+12 pCi/Ci)/(Conc,pCi/ml).

b) Effective Flow rate, in cfs, is calculated using the following equation:

$$\text{Flow Rate, cfs} = (\text{Total Flow, ml/yr}) / (8.93\text{E}+11 \text{ ml-sec/ft}^3\text{-yr})$$

c) Estuary effective flow rate is used for the collective dose calculation

Data Table A-7. Radioactive Liquid Releases by Source (Curies)

Data Table A-7, Radioactive Liquid Releases by Source (Curies)

Nuclide	Reactor Areas C,K,L,P,R	Separations Areas F,H,S,Z, Tritium	SRNL Area A	Totals
H-3 ^a	2.39E+02	4.98E+02	1.23E-02	7.86E+02
C-14		3.29E-03	2.04E-03	5.33E-03
Sr-90	0.00E+00	2.43E-02		2.43E-02
Tc-99		1.30E-02	0.00E+00	1.30E-02
I-129		1.44E-02	0.00E+00	1.44E-02
Cs-137 ^b	0.00E+00	1.08E-02	0.00E+00	4.68E-02
U-234		6.77E-02	3.88E-05	6.77E-02
U-235		2.50E-03	1.23E-06	2.50E-03
U-238		7.55E-02	2.64E-05	7.55E-02
Np-237		3.21E-07		3.21E-07
Pu-238		5.11E-04	2.03E-06	5.13E-04
Pu-239		1.10E-04	0.00E+00	1.10E-04
Am-241		1.79E-04		1.79E-04
Cm-244		1.21E-04		1.21E-04
Alpha ^c	6.41E-03	1.79E-03	3.92E-04	8.60E-03
Beta-Gamma ^d	8.81E-02	6.63E-03	5.61E-04	9.53E-02

a) For 2015, the higher tritium transport release value (786 Ci) was used in the dose calculations for SRS impacts.

b) Depending on which value is higher, the Cs-137 release total is based on concentrations measured in RM 118.8 fish or on the actual measured effluent release total from the site. Refer to chapter 6 (Dose) for more information.

c,d) For dose calculations, unspecified alpha and beta/gamma releases are assumed to be Pu-239 and Sr-90, respectively.

Data Table A-8. Radioactive Liquid Releases, 2011-2015 (Curies)

Data Table A-8, Radioactive Liquid Releases, 2011-2015 (curies)

Radionuclide	2011	2012	2013	2014	2015	2014 to 2015 Percent Change
H-3	9.42E+02	7.46E+02	1.08E+03	6.99E+02	7.86E+02	12%
C-14	1.11E-02	4.33E-03	6.13E-03	6.40E-03	5.33E-03	-17%
Sr-89,90	2.94E-02	1.81E-02	2.39E-02	5.36E-02	2.43E-02	-55%
Tc-99	1.07E-02	1.09E-02	1.85E-02	2.64E-02	1.30E-02	-51%
I-129	1.48E-02	1.33E-02	2.70E-02	2.45E-02	1.44E-02	-41%
Cs-137	8.05E-02	5.09E-02	3.34E-02	5.09E-02	1.08E-02	-79%
U-234	7.44E-02	7.48E-02	4.54E-02	7.22E-02	6.77E-02	-6%
U-235	3.50E-03	3.84E-03	2.63E-03	3.65E-03	2.50E-03	-32%
U-238	8.80E-02	7.73E-02	5.50E-02	8.45E-02	7.55E-02	-11%
Np-237	3.56E-06	5.14E-06	5.05E-07	5.97E-06	3.21E-07	-95%
Pu-238	1.03E-03	6.79E-04	6.27E-04	3.65E-04	5.13E-04	41%
Pu-239	4.39E-05	5.69E-05	4.81E-05	1.56E-04	1.10E-04	-30%
Am-241	4.06E-04	3.93E-03	4.27E-03	3.36E-03	1.79E-04	-95%
Cm-244	3.99E-04	6.82E-04	2.23E-05	4.83E-04	1.21E-04	-75%
Alpha	1.35E-02	1.40E-02	5.18E-03	3.56E-03	8.60E-03	141%
Beta-Gamma	3.30E-02	4.88E-02	4.12E-02	2.87E-02	9.53E-02	232%

Data Table A-9. Radionuclide Concentrations at Downriver Drinking Water Plants Compared to EPA MCLs

**Data Table A-9,
Radionuclide Concentrations at the Downriver Drinking Water Plants Compared to EPA MCLs**

Nuclide	EPA MCL (pCi/L)	<u>12-Month Average Concentrations</u>			
		Below SRS ^(a) (pCi/L)	Fraction of EPA MCL (unitless)	BJWSA Purrysburg ^(b) (pCi/L)	Fraction of EPA MCL (unitless)
H-3 ^(c)	2.00E+04	4.81E+02	2.41E-02	4.03E+02	2.02E-02
C-14	2.00E+03	9.99E-04	5.00E-07	8.37E-04	4.19E-07
Sr-90	8.00E+00	4.56E-03	5.70E-04	3.82E-03	4.77E-04
Tc-99	9.00E+02	2.44E-03	2.71E-06	2.04E-03	2.27E-06
I-129	1.00E+00	2.70E-03	2.70E-03	2.26E-03	2.26E-03
Cs-137	2.00E+02	8.77E-03	4.39E-05	7.35E-03	3.68E-05
U-234 ^(d)	1.03E+01	1.27E-02	1.23E-03	1.06E-02	1.03E-03
U-235 ^(d)	4.67E-01	4.69E-04	1.00E-03	3.93E-04	8.42E-04
U-238 ^(d)	1.00E+01	1.42E-02	1.41E-03	1.19E-02	1.19E-03
Np-237	1.50E+01	6.02E-08	4.01E-09	5.04E-08	3.36E-09
Pu-238	1.50E+01	9.62E-05	6.41E-06	8.06E-05	5.37E-06
Pu-239	1.50E+01	2.06E-05	1.37E-06	1.73E-05	1.15E-06
Am-241	1.50E+01	3.36E-05	2.24E-06	2.81E-05	1.87E-06
Cm-244	1.50E+01	2.27E-05	1.51E-06	1.90E-05	1.27E-06
Alpha	1.50E+01	1.61E-03	1.07E-04	1.35E-03	9.01E-05
Nonvolatile Beta	8.00E+00	1.79E-02	2.23E-03	1.50E-02	1.87E-03
Sum of the Fractions =			3.34E-02		2.80E-02

a. Near Savannah River Mile 118.8, downriver of SRS at the U.S. Highway 301 bridge

b. Beaufort-Jasper Water and Sewer Authority, drinking water at the Purrysburg Plant

c. The tritium concentrations and source term are based on actual measurements of the Savannah River water at the various locations. They include contributions from VEGP and the Barnwell Low-Level Disposal Facility. All other radionuclide concentrations are calculated based on the effective or measured river flow rate.

d. MCLs for Uranium based on radioisotope specific activity X 30 µg/L X isotopic abundance

Data Table A-9 – Support. 2015 Radioactive Liquid Release Source Term and 12-Month Average Downriver Radionuclide Concentrations Compared to the US EPA's Drinking Water Maximum Contaminant Levels (MCL)

2015 Radioactive Liquid Release Source Term and 12-Month Average Downriver Radionuclide Concentrations Compared to the US EPA's Drinking Water Maximum Contaminant Levels (MCL)

Nuclide	<u>12-Month Average Concentration (pCi/L)</u>				<u>Output from LADTAP XL (uCi/mL)</u>	
	Curies Released	Below SRS ^(a)	at BJWSA Purrysburg ^(b)	EPA MCL ^(d)	Below SRS ^(a)	at BJWSA Purrysburg ^(b)
H-3 ^(c)	7.86E+02	4.81E+02	4.03E+02	2.00E+04	4.81E-07	4.03E-07
C-14	5.33E-03	9.99E-04	8.37E-04	2.00E+03	9.99E-13	8.37E-13
Sr-90	2.43E-02	4.56E-03	3.82E-03	8.00E+00	4.56E-12	3.82E-12
Tc-99	1.30E-02	2.44E-03	2.04E-03	9.00E+02	2.44E-12	2.04E-12
I-129	1.44E-02	2.70E-03	2.26E-03	1.00E+00	2.70E-12	2.26E-12
Cs-137	4.68E-02	8.77E-03	7.35E-03	2.00E+02	8.77E-12	7.35E-12
U-234	6.77E-02	1.27E-02	1.06E-02	1.03E+01	1.27E-11	1.06E-11
U-235	2.50E-03	4.69E-04	3.93E-04	4.67E-01	4.69E-13	3.93E-13
U-238	7.55E-02	1.42E-02	1.19E-02	1.00E+01	1.42E-11	1.19E-11
Np-237	3.21E-07	6.02E-08	5.04E-08	1.50E+01	6.02E-17	5.04E-17
Pu-238	5.13E-04	9.62E-05	8.06E-05	1.50E+01	9.62E-14	8.06E-14
Pu-239	1.10E-04	2.06E-05	1.73E-05	1.50E+01	2.06E-14	1.73E-14
Am-241	1.79E-04	3.36E-05	2.81E-05	1.50E+01	3.36E-14	2.81E-14
Cm-244	1.21E-04	2.27E-05	1.90E-05	1.50E+01	2.27E-14	1.90E-14
Alpha	8.60E-03	1.61E-03	1.35E-03	1.50E+01	1.61E-12	1.35E-12
Beta	9.53E-02	1.79E-02	1.50E-02	8.00E+00	1.79E-11	1.50E-11

a. Near Savannah River Mile 118.8, downriver of SRS at the U.S. Highway 301 bridge

b. Beaufort-Jasper Water and Sewer Authority, drinking water at the Purrysburg Plant

c. The tritium concentrations and source term are based on actual measurements of the Savannah River water at the various locations. They include contributions from VEGP and the Barnwell Low-Level Disposal Facility.

All other radionuclide concentrations are calculated based on the effective or measured river flow rate.

d. MCLs for Uranium based on radioisotope specific activity X 30 µg/L X isotopic abundance

Data Table A-10. Adjustment of Cs-137 Release Based on Fish Concentrations

Data Table A-10, Adjustment of Cs-137 Release Based on Fish Concentrations

Activity in Fish		Cs-137				
		Conc,pCi/g				
River Mile 118.8 wtd avg conc		2.63E-02				
		RM				
	Measured Ci	LADTAP	118.8	Calc Fish	Meas Fish	Ratio
Cs-137	Released	BAF	Flow, cfs	Conc,pCi/g	Conc,pCi/g	meas/calc
RM118.8-Max Ind	1.08E-02	3000	5,972	6.08E-03	2.63E-02	4.33

Ratios (right column) are multipliers for measured releases in order for LADTAP to calculate the appropriate dose using the built in BAF factors. Calculated release values used in LADTAP calculations are shown below:

Cs-137	Multiplier (ratio)	Measured Ci Release	Calc Ci Release
RM118.8-Max Ind	4.33	1.08E-02	4.68E-02

(see note below)

Cs-137 direct releases: 1.08E-02 Ci
2015 total effective flow RM 118.8: 5.33E+15 ml
Calc Cs-137 conc = 2.03E-06 pCi/ml

Ratios of Measured/Calculated Conc. of Cs-137 in fish

Year	Ratio	Year	Ratio
1985	5.2	2001	0.8
1986	8.4	2002	2.1
1987	3.0	2003	0.54
1988	1.4	2004	0.27
1989	1.2	2005	0.42
1990	6.8	2006	0.39
1991	25.3	2007	0.6
1992	1.2	2008	0.56
1993	1.1	2009	0.45
1994	1.4	2010	1.3
1995	3.1	2011	0.34
1996	1.3	2012	0.5
1997	2.6	2013	2.36
1998	1.2	2014	0.77
1999	2.3	2015	4.33
2000	1.1		

NOTE: FOR 2015, THE CALCULATED CS-137 EFFLUENT RELEASE VALUE OF 0.0468 CURIE WAS USED IN THE DOSE CALCULATIONS INSTEAD OF THE MEASURED EFFLUENT RELEASE VALUE OF 0.0108 CURIE.

Data Table A-10 – *Support.* Adjustment of Cs-137 Liquid Release Based on Fish Concentrations

Adjustment of Cs-137 Liquid Release Based on Fish Concentrations

Cesium-137 Measured Mean Concentrations in River Mile 118.8 Fish

Location	Species	Number of Composites	Cs-137, pCi/g	# comp X avg. conc.
			Average	pCi/g
River Mile 118.8	bass	3	2.51E-02	7.53E-02
	catfish	3	2.75E-02	8.25E-02
	panfish	3	2.63E-02	7.89E-02
	Total Composites	9	Sum =	2.37E-01

Overall weighted average----->	2.63E-02
--------------------------------	----------

Data Table A-11. Representative Person Dose - All Liquid Pathways Including Irrigation

Data Table A-11, Representative Person Dose - All Liquid Pathways Including Irrigation

By Pathway

Pathway	Representative Person Dose, mrem ^(a)	Percent of Total Dose
Vegetable	7.7E-02	52%
Milk	1.2E-02	9%
Meat	3.7E-03	3%
Fish Consumption	3.4E-02	23%
Water Consumption	1.9E-02	13%
Shoreline	3.4E-04	0%
Swimming and Boating	5.9E-06	0%
Total	1.5E-01	

By Radionuclide

Radionuclide	Representative Person Dose, mrem ^(a)	Percent of Total Dose
H-3 (oxide)	1.7E-02	12%
C-14	8.1E-05	0%
Sr-90	6.9E-03	5%
Tc-99	1.8E-02	12%
I-129	9.4E-03	6%
Cs-137	3.4E-02	23%
U-234	1.3E-02	9%
U-235	4.5E-04	0%
U-238	1.3E-02	9%
Np-237	1.2E-07	0%
Pu-238	3.8E-04	0%
Pu-239	8.9E-05	0%
Am-241	2.7E-04	0%
Cm-244	5.2E-05	0%
Alpha	7.0E-03	5%
Nonvolatile Beta	2.7E-02	19%
Total	1.5E-01	

a) Committed effective dose

Data Table A-11 – *Support.* Irrigation Pathway Doses from Irridose

Irrigation Pathway Doses from Irridose

IRRIDOSE (Irrigation Pathway)	
Food Type	Representative Person, mrem
Vegetable	7.7E-02
Milk	1.2E-02
Meat	3.7E-03
Total	9.3E-02

Irrigation Pathway Doses	
Radionuclide	Representative Person Dose, mrem
H-3 (oxide)	7.6E-03
C-14	7.9E-05
Sr-90	6.3E-03
Tc-99	1.8E-02
I-129	7.6E-03
Cs-137	2.5E-03
U-234	1.1E-02
U-235	3.7E-04
U-238	1.1E-02
Np-237	8.5E-08
Pu-238	2.4E-04
Pu-239	5.6E-05
Am-241	7.7E-05
Cm-244	3.3E-05
Alpha	4.4E-03
Nonvolatile Beta	2.5E-02
Total	9.3E-02

Data Table A-12. Comparison of 2011-2015 Offsite Doses

Data Table A-12, Comparison of 2011-2015 Offsite Doses

		<u>2011</u>	<u>2012</u>	<u>2013</u>	<u>2014</u>	<u>2015</u>
Atmospheric Releases						
MEI or Representative Person, mrem ^(a)						
	All Pathways	3.2E-02	2.7E-02	5.2E-02	4.4E-02	3.2E-02
Population, person-rem						
	50-mile (80-km) Population	1.2E+00	7.6E-01	2.2E+00	1.7E+00	1.1E+00
Liquid Releases						
MEI or Representative Person, mrem ^(a)						
	All Pathways Except Irrigation	8.4E-02	1.0E-01	5.2E-02	4.1E-02	5.3E-02
	Irrigation Pathway	9.2E-02	1.3E-01	9.0E-02	7.4E-02	9.3E-02
Population, person-rem						
	Down River Population	1.8E+00	1.9E+00	1.2E+00	9.1E-01	1.3E+00
	Irrigation Pathway at RM 118.8	1.3E+00	1.9E+00	1.3E+00	1.1E+00	1.3E+00
Total MEI or Representative Person ^(b)		0.21	0.26	0.19	0.16	0.18
(Air + Liquid + Irrigation) (mrem)						
Total Population ^(b)		4.3	4.6	4.7	3.7	3.7
(Air + Liquid + Irrigation) (person-rem)						

a. In 2012, SRS changed from the MEI to the Representative Person concept for dose compliance.

b. Starting in 2011, the total doses include the irrigation liquid pathway. The irrigation pathway was not included in the totals prior to 2011.

Data Table A-13. Representative Person Drinking Water Dose

Data Table A-13, Representative Person Drinking Water Dose

(Based on Tritium Measurements from the BJSWA Purrysburg Treatment Plant)

Radionuclide	Representative Person	
	Dose, mrem ^(a)	Percent of Total Dose
H-3 (oxide)	7.7E-03	49%
C-14	1.9E-06	0%
Sr-90	4.1E-04	3%
Tc-99	5.4E-06	0%
I-129	8.1E-04	5%
Cs-137	2.9E-04	2%
U-234	1.8E-03	11%
U-235	6.4E-05	0%
U-238	1.8E-03	11%
Np-237	1.9E-08	0%
Pu-238	6.3E-05	0%
Pu-239	1.5E-05	0%
Am-241	2.0E-05	0%
Cm-244	8.5E-06	0%
Alpha	1.2E-03	8%
Nonvolatile Beta	1.6E-03	10%
Total	1.6E-02	

a) Committed effective dose

Data Table A-14. Collective Drinking Water Doses (person-rem)

Data Table A-14, Collective Drinking Water Doses (person-rem)

For the Beaufort Jasper Water and Sewer Authority Chelsea and Purrysburg Water Treatment Plants and the Savannah Industrial and Domestic Water Treatment Plant

Radionuclide	BJWSA Chelsea^(a)	BJWSA Purrysburg^(b)	Savannah I&D^(c)
H-3 (oxide)	2.4E-01	1.8E-01	1.0E-01
C-14	4.9E-05	3.8E-05	1.1E-04
Sr-90	1.3E-02	9.8E-03	5.3E-03
Tc-99	1.7E-04	1.3E-04	7.1E-05
I-129	2.5E-02	2.0E-02	1.1E-02
Cs-137	9.0E-03	7.0E-03	3.8E-03
U-234	5.7E-02	4.4E-02	2.4E-02
U-235	2.0E-03	1.5E-03	8.4E-04
U-238	5.7E-02	4.4E-02	2.4E-02
Np-237	5.8E-07	4.5E-07	2.4E-07
Pu-238	2.0E-03	1.5E-03	8.2E-04
Pu-239	4.6E-04	3.5E-04	1.9E-04
Am-241	6.2E-04	4.8E-04	2.6E-04
Cm-244	2.6E-04	2.0E-04	1.1E-04
Alpha	3.6E-02	2.8E-02	1.5E-02
Nonvolatile Beta	5.0E-02	3.8E-02	2.1E-02
Total	4.9E-01	3.8E-01	2.1E-01

a) 82,900 people served

b) 64,200 people served

c) 35,000 people served

Data Table A-15. Collective Dose - All Liquid Pathways Including Irrigation

Data Table A-15, Collective Dose - All Liquid Pathways Including Irrigation

By Pathway

Pathway	Collective Dose (person-rem)^(a)	Percent of Total Dose
Sport fish	1.2E-02	0%
Commercial fish	8.1E-02	3%
Saltwater invertebrates	8.6E-02	3%
Shoreline Exposure	1.1E-02	0%
Swimming	1.2E-04	0%
Boating	1.1E-05	0%
Beaufort-Jasper (Chelsea)	4.9E-01	19%
Beaufort-Jasper (Purrysburg)	3.8E-01	15%
Savannah I&D	2.1E-01	8%
Vegetable consumption	1.3E+00	49%
Milk consumption	6.6E-02	3%
Meat consumption	1.8E-03	0%
Total	2.6E+00	

By Radionuclide

Radionuclide	Collective Dose (person-rem)^(a)	Percent of Total Dose
H-3	6.0E-01	23%
C-14	6.3E-03	0%
Sr-90	1.3E-01	5%
Tc-99	2.6E-01	10%
I-129	1.6E-01	6%
Cs-137	1.4E-01	5%
U-234	2.8E-01	11%
U-235	1.0E-02	0%
U-238	2.9E-01	11%
Np-237	2.7E-06	0%
Pu-238	9.0E-03	0%
Pu-239	5.8E-03	0%
Am-241	4.0E-03	0%
Cm-244	1.8E-03	0%
Alpha	2.1E-01	8%
Nonvolatile Beta	5.0E-01	19%
Total	2.6E+00	

a) Committed effective dose

Data Table A-16. Radioactive Atmospheric Releases by Source (Curies)(a)

Table A-16, Radioactive Atmospheric Releases by Source (Curies)^(a)

2 Pages

Radionuclide	Half-Life	Calculated ^(b)	Reactors	Separations ^(c)	SRNL ^(d)	Total
Gases and Vapors						
H-3 (oxide)	12.35 y	2.08E+03	9.20E+02	1.36E+04		1.66E+04
H-3 (elemental)	12.35 y			2.47E+03		2.47E+03
H-3 Total	12.35 y	2.08E+03	9.20E+02	1.61E+04		1.91E+04
C-14	5730 y	1.30E-06		1.37E-02		1.37E-02
Kr-85	10.72 y			2.78E+03		2.78E+03
I-129	1.57E+07 y	5.38E-05		1.87E-03	1.15E-06	1.93E-03
Particles						
Ag-110m	249.9 d	1.48E-11				1.48E-11
Am-241	432.2 y	1.12E-05	8.06E-11	2.07E-06		1.33E-05
Am-243	7380 y	5.26E-09				5.26E-09
Ce-141	32.501 d	4.94E-11				4.94E-11
Ce-144	284.3 d	2.00E-08				2.00E-08
Cm-242	162.8 d	1.89E-16				1.89E-16
Cm-244	18.11 y	2.79E-07	0.00E+00	1.82E-08		2.97E-07
Co-60	5.271 y	4.37E-07	0.00E+00	0.00E+00	0.00E+00	4.37E-07
Cs-134	2.062 y	4.31E-07				4.31E-07
Cs-137	30 y	1.16E-03	0.00E+00	1.42E-05	4.53E-07	1.18E-03
Eu-152	13.33 y	5.01E-08				5.01E-08
Eu-154	8.8 y	3.55E-07				3.55E-07
Eu-155	4.96 y	1.18E-07				1.18E-07
F-18	109.77 m	4.00E-02				4.00E-02
Nb-94	2.03E+04 y	2.42E-07				2.42E-07
Nb-95	35.15 d	3.63E-07				3.63E-07
Ni-59	7.50E+04 y	5.76E-11				5.76E-11
Ni-63	96 y	5.62E-09				5.62E-09
Np-237	2.14E+06 y	1.61E-06	0.00E+00	0.00E+00		1.61E-06
Pa-233	27 d	1.42E-06				1.42E-06
Pb-212	10.64 h	8.43E-07				8.43E-07
Pm-147	2.6234 y	2.89E-06				2.89E-06
Pm-148m	41.3 d	1.90E-12				1.90E-12
Pr-144	17.28 m	2.00E-08				2.00E-08
Pu-236	2.851 y	5.75E-10				5.75E-10
Pu-238	87.74 y	3.15E-05	4.08E-09	4.06E-06		3.55E-05
Pu-239	2.41E+04 y	4.32E-05	1.07E-10	3.94E-06		4.72E-05
Pu-240	6537 y	7.73E-06				7.73E-06
Particles						
Pu-241	14.4 y	2.07E-04				2.07E-04

Table A-16, Radioactive Atmospheric Releases by Source (Curies)^(a)

2 Pages

Radionuclide	Half-Life	Calculated ^(b)	Reactors	Separations ^(c)	SRNL ^(d)	Total
Pu-242	3.76E+05 y	1.78E-08				1.78E-08
Ra-226	1600 y	2.76E-07				2.76E-07
Ra-228	5.75 y	2.62E-07				2.62E-07
Rh-106	29.9 s	1.19E-08				1.19E-08
Ru-103	39.28 d	5.11E-10				5.11E-10
Ru-106	368.2 d	3.04E-06				3.04E-06
Sb-125	2.77 y	1.18E-06				1.18E-06
Sb-126	12.4d	1.70E-07				1.70E-07
Se-79	6.50E+04 y	4.90E-09				4.90E-09
Sm-151	90 y	2.89E-06				2.89E-06
Sn-123	129.2 d	6.66E-12				6.66E-12
Sn-126	1.00E+05 y	1.70E-07				1.70E-07
Sr-89	50.5 d	6.02E-10				6.02E-10
Sr-90	29.12 y	3.32E-05	2.26E-09	1.12E-05		4.44E-05
Tc-99	2.13E+05 y	3.87E-07				3.87E-07
Te-127	9.35 h	1.04E-11				1.04E-11
Te-129	69.6 m	1.05E-12				1.05E-12
Th-228	1.9131 y	7.26E-10	1.38E-10			8.64E-10
Th-229	7340 y	1.56E-09				1.56E-09
Th-230	7.70E+04 y	1.55E-10	9.20E-09			9.36E-09
Th-231	25.52 h	2.12E-04				2.12E-04
Th-232	1.41E+10 y	1.07E-11	2.42E-09			2.43E-09
Tl-208	3.07 m	1.41E-06				1.41E-06
U-232	72 y	6.56E-09				6.56E-09
U-233	1.59E+05 y	5.78E-09				5.78E-09
U-234	2.45E+05 y	6.08E-07	1.50E-09	6.41E-06		7.02E-06
U-235	7.04E+08 y	6.99E-09	0.00E+00	8.19E-07		8.26E-07
U-236	2.34E+07 y	3.01E-08				3.01E-08
U-238	4.47E+09 y	2.10E-07	1.66E-09	8.48E-06		8.69E-06
Y-90	64 h	3.32E-05	2.26E-09	1.12E-05		4.44E-05
Y-91	58.51 d	7.98E-10				7.98E-10
Zr-95	63.98 d	1.22E-07				1.22E-07
Unidentified alpha	N/A	1.79E-05	1.27E-05	2.09E-07	0.00E+00	3.08E-05
Unidentified beta	N/A	1.43E-03	3.57E-05	6.31E-04	2.55E-06	2.09E-03

a. One curie equals 3.7E+10 Becquerels

b. Estimated releases from unmonitored sources

c. Includes separations, waste management, and tritium facilities

d. Savannah River National Laboratory

Data Table A-17. 2011-2015 Atmospheric Releases (Curies)

Data Table A-17, 2011-2015 Atmospheric Releases (Curies)

3 Pages

Radionuclide	2011	2012	2013	2014	2015	2014-2015 % Difference
Gases and Vapors						
H-3 (oxide)	2.38E+04	1.39E+04	2.11E+04	2.38E+04	1.66E+04	-30%
H-3 (elem)	4.30E+03	2.77E+03	3.17E+03	3.49E+03	2.47E+03	-29%
H-3 Total	2.81E+04	1.67E+04	2.43E+04	2.73E+04	1.91E+04	-30%
C-14	1.30E-03	5.34E-02	1.14E-01	2.08E-01	1.37E-02	-93%
Kr-85		8.91E+03	1.51E+04	6.46E+03	2.78E+03	-57%
I-129	1.42E-03	1.65E-03	1.41E-03	2.21E-03	1.93E-03	-13%
I-131	1.44E-04					
Particles						
Ag-110m	1.57E-11	1.57E-11	1.48E-11	1.48E-11	1.48E-11	0%
Am-241	3.19E-05	2.76E-05	1.60E-05	1.91E-05	1.33E-05	-30%
Am-242m				6.19E-10		
Am-243	5.53E-07	2.14E-06		1.25E-08	5.26E-09	
Ba-133		1.37E-04				
Bi-212		1.06E-04				
Bi-214		1.28E-03				
Ce-141	1.65E-04	1.61E-04	4.94E-11	4.94E-11	4.94E-11	0%
Ce-144	3.87E-04	6.07E-04	2.00E-08	6.50E-06	2.00E-08	-100%
Cf-249		1.35E-04		3.74E-08		
Cf-251		3.74E-04		3.04E-08		
Cm-242		2.14E-09	1.89E-16	5.12E-10	1.89E-16	-100%
Cm-243				3.45E-08		
Cm-244	1.38E-06	1.86E-06	3.66E-07	4.31E-07	2.97E-07	-31%
Cm-245				2.97E-08		
Cm-246				4.90E-09		
Cm-247		1.17E-06		3.30E-08		
Co-57		7.79E-05				
Co-58		1.33E-05				
Co-60	3.64E-04	3.20E-04	8.49E-06	4.30E-06	4.37E-07	-90%
Cs-134	4.57E-07	1.92E-05	4.31E-07	4.31E-07	4.31E-07	0%
Cs-137	1.41E-02	1.21E-02	7.70E-02	1.69E-02	1.18E-03	-93%
Eu-152	1.89E-04	3.04E-04		5.43E-07	5.01E-08	
Eu-154	7.10E-04	7.20E-04	3.55E-07	7.19E-07	3.55E-07	-51%
Eu-155	9.14E-06	3.20E-04	1.18E-07	2.22E-06	1.18E-07	-95%
F-18	4.00E-02	3.20E-02	3.60E-02	2.00E-02	4.00E-02	100%
Mn-54	9.37E-06	1.36E-05		4.84E-07		

Data Table A-17, 2011-2015 Atmospheric Releases (Curies)

3 Pages

Radionuclide	2011	2012	2013	2014	2015	2014-2015 %
Na-22	7.87E-06	1.17E-05				
Nb-94	8.79E-06	1.38E-05	2.42E-07	2.42E-07	2.42E-07	0%
Nb-95	2.70E-09	2.70E-09	3.63E-07	3.63E-07	3.63E-07	0%
Ni-59	6.01E-05	6.70E-05	5.76E-11	2.91E-07	5.76E-11	-100%
Ni-63	4.41E-06	3.70E-03	5.62E-09	2.00E-06	5.62E-09	-100%
Np-237	3.31E-06	4.08E-06	1.53E-06	7.09E-06	1.61E-06	-77%
Np-239	3.49E-04	5.87E-04				
Pa-233	1.51E-06	1.99E-04	1.42E-06	1.42E-06	1.42E-06	0%
Pb-212		1.69E-04	8.43E-07	8.43E-07	8.43E-07	0%
Pb-214		2.07E-06		8.84E-13		
Pm-144	8.67E-06	1.44E-05				
Pm-146	1.11E-04	1.77E-04				
Pm-147	3.06E-06	3.29E-06	2.89E-06	2.89E-06	2.89E-06	0%
Pm-148m	2.02E-12	2.02E-12	1.90E-12	1.90E-12	1.90E-12	0%
Particles						
Pr-144	2.12E-08	2.12E-08	2.00E-08	2.00E-08	2.00E-08	0%
Pu-236	3.80E-10			1.83E-10	5.75E-10	
Pu-238	1.95E-04	9.45E-05	1.48E-04	4.25E-05	3.55E-05	-16%
Pu-239	1.07E-04	9.79E-04	8.58E-04	4.27E-05	4.72E-05	11%
Pu-240	2.93E-05	2.91E-05	7.68E-06	7.73E-06	7.73E-06	0%
Pu-241	3.91E-04	3.24E-04	2.07E-04	2.09E-04	2.07E-04	-1%
Pu-242	2.37E-06	2.54E-06	1.38E-08	1.56E-08	1.78E-08	14%
Ra-226	8.67E-06	1.17E-06	3.01E-07	2.73E-07	2.76E-07	1%
Ra-228	2.69E-07	3.44E-07	3.01E-07	2.65E-07	2.62E-07	-1%
Rh-106	1.40E-08	1.40E-08	1.19E-08	1.19E-08	1.19E-08	0%
Ru-103	1.12E-04	1.16E-04	5.11E-10	5.11E-10	5.11E-10	0%
Ru-106	4.20E-04	6.43E-04	3.04E-06	3.04E-06	3.04E-06	0%
Sb-124	7.96E-05					
Sb-125	2.36E-04	1.59E-05	1.18E-06	1.28E-06	1.18E-06	-8%
Sb-126		1.93E-04	1.70E-07	1.70E-07	1.70E-07	0%
Se-79	5.19E-09	3.59E-06	4.90E-09	4.90E-09	4.90E-09	0%
Sm-151	3.07E-06	3.07E-06	2.89E-06	2.89E-06	2.89E-06	0%
Sn-113		1.46E-04				
Sn-123	7.06E-12	7.06E-12	6.66E-12	6.66E-12	6.66E-12	0%
Sn-126	7.06E-12	1.93E-04	1.70E-07	1.70E-07	1.70E-07	0%
Sr-89		4.36E-10	4.12E-10	5.18E-10	6.02E-10	16%
Sr-89,90	9.86E-02	9.83E-02	4.88E-04	9.79E-05	4.44E-05	-55%
Tc-99	7.08E-04	1.58E-03	4.09E-07	1.94E-06	3.87E-07	-80%
Te-127	1.10E-11	1.10E-11	1.04E-11	1.04E-11	1.04E-11	0%

Data Table A-17, 2011-2015 Atmospheric Releases (Curies)

3 Pages

Radionuclide	2011	2012	2013	2014	2015	2014-2015 %
Te-129	1.11E-12	1.11E-12	1.05E-12	1.05E-12	1.05E-12	0%
Th-228		2.48E-10	1.71E-10	2.17E-09	8.64E-10	-60%
Th-229	7.70E-10			9.28E-10	1.56E-09	
Th-230	7.00E-11	6.32E-09	9.71E-08	6.80E-07	9.36E-09	-99%
Th-231		2.25E-04	2.12E-04	2.12E-04	2.12E-04	0%
Th-232		1.21E-09	1.04E-09	4.44E-09	2.43E-09	-45%
Tl-208		7.88E-05	1.41E-06	1.41E-06	1.41E-06	0%
U-232	3.50E-09	3.39E-06	2.23E-10	3.19E-09	6.56E-09	105%
U-233	4.02E-06	8.32E-05	3.47E-10	3.93E-07	5.78E-09	-99%
U-234	2.98E-05	5.94E-06	2.85E-05	9.38E-06	7.02E-06	-25%
U-235	2.26E-04	2.42E-05	1.00E-06	2.27E-07	8.26E-07	264%
U-236	3.19E-08	3.19E-08	3.01E-08	3.01E-08	3.01E-08	0%
U-238	1.25E-05	8.90E-06	3.00E-05	1.29E-05	8.69E-06	-33%
Y-88	1.01E-07	1.26E-05				
Y-90		9.80E-02	4.78E-04	9.47E-05	4.44E-05	-53%
Y-91	8.46E-10	8.46E-10	7.98E-10	7.98E-10	7.98E-10	0%
Zn-65	1.93E-07	3.15E-05		1.96E-06		
Zr-95	2.44E-07	2.59E-05	1.22E-07	1.22E-07	1.22E-07	0%
Alpha	2.85E-05	1.52E-04	1.25E-03	1.04E-04	3.08E-05	-70%
Beta-Gamma	7.97E-03	1.99E-02	4.17E-02	2.15E-03	2.09E-03	-2%

Data Table A-18. Comparison of Measured vs. Calculated Tritium in Air Concentrations

Data Table A-18, Comparison of Measured vs. Calculated Tritium in Air Concentrations

Source of Data	pCi/m ³	
	Avg Conc	Max. Sector
Measured	4.6	6.6
Calculated:		
MAXDOSE-SR	9.1	17.3
CAP88PC	6.9	10.0

CAP88 Chi/Q and HTO Concentration Calculated from Chi/Q based on Curies Released:

5.36E+03 0-m Ci/yr
1.12E+04 61-m Ci/yr

Toward Sector	Distance m	2007-2011 Chi/Q		HTO Conc. pCi/m ³
		61-m sec/m ³	0-m sec/m ³	
N	15621	1.635E-08	2.444E-08	10.0
NNW	15032	1.221E-08	1.877E-08	7.5
NW	14470	9.842E-09	1.455E-08	6.0
WNW	13684	9.432E-09	1.353E-08	5.6
W	13880	1.043E-08	1.378E-08	6.0
WSW	15341	1.247E-08	1.637E-08	7.2
SW	15944	1.473E-08	2.088E-08	8.8
SSW	16759	8.944E-09	1.386E-08	5.5
S	15034	6.581E-09	1.060E-08	4.1
SSE	15030	6.171E-09	1.035E-08	4.0
SE	15032	7.437E-09	1.154E-08	4.6
ESE	15302	1.105E-08	1.573E-08	6.6
E	13013	1.269E-08	1.773E-08	7.5
ENE	15985	1.416E-08	2.048E-08	8.5
NE	17202	1.424E-08	2.111E-08	8.6
NNE	16082	1.502E-08	2.370E-08	9.4
Maximum		1.635E-08	2.444E-08	10.0
Minimum		6.171E-09	1.035E-08	4.0
Mean		1.136E-08	1.671E-08	6.9

Measured HTO Concentration in Air at Site Perimeter (from Data Table A-18)

Location	pCi/m ³ of Air
Allendale Gate	3.0
Barnwell Gate	5.0
D-Area	6.6
Darkhorse	5.2
East Talatha	5.2
Greenpond	5.0
Highways 21 & 167	3.5
Jackson	4.3
Patterson Mill Road	3.8
Talatha Gate	4.5
Maximum	6.6
Minimum	3.0
Mean	4.6

Data Table A-19. MAXDOSE-SR Representative Person Dose Using Cow Milk Pathway

Data Table A-19, MAXDOSE-SR Representative Person Dose Using Cow Milk Pathway

2015 MAXDOSE-SR Representative Person Dose Using Cow Milk Pathway (mrem)

Plume	5.3E-05	0.16%
Ground	1.4E-04	0.42%
Inhalation	1.2E-02	37.70%
Vegetation	1.2E-02	36.77%
Cow Milk	7.9E-03	24.62%
Meat	1.0E-04	0.32%
Total	3.2E-02	100.0%
Gases and Vapors		
H-3	3.1E-02	95.88%
C-14	1.1E-05	0.03%
K-85	5.3E-05	0.16%
I-129	7.9E-04	2.46%
Particulates		
Am-241	1.7E-05	0.05%
Cs-137	1.4E-04	0.44%
Pu-238	5.0E-05	0.15%
Pu-239	7.2E-05	0.22%
Pu-240	1.2E-05	0.04%
Pu-241	5.7E-06	0.02%
Sr-90	3.4E-06	0.01%
Alpha	3.5E-05	0.11%
Non-Volatile Beta	1.3E-04	0.41%
Total	3.2E-02	100.0%
NOTE: (a) Committed effective dose		
NOTE: (b) Radionuclides contributing 0.01% or more of the total dose		

Data Table A-20. Sector-Specific Representative Person Airborne Pathway Doses (Using Cow Milk Pathway)

Data Table A-20, Sector-Specific Representative Person Airborne Pathway Doses (Using Cow Milk Pathway)

2015 Representative Person Airborne Pathway Doses (mrem)

N ^(a)	0.032
NNE	0.028
NE	0.022
ENE	0.022
E	0.022
ESE	0.017
SE	0.012
SSE	0.011
S	0.010
SSW	0.012
SW	0.021
WSW	0.024
W	0.020
WNW	0.020
NW	0.023
NNW	0.029

NOTE: (a) Maximum Location

Data Table A-21. MAXDOSE-SR Representative Person Dose Using Goat Milk Pathway

Data Table A-21, MAXDOSE-SR Representative Person Dose Using Goat Milk Pathway

2015 Representative Person Dose Using Goat Milk Pathway (mrem)

Plume	5.3E-05	0.14%
Ground	1.4E-04	0.37%
Inhalation	1.2E-02	33.25%
Vegetation	1.2E-02	32.43%
Goat Milk	1.2E-02	33.52%
Meat	1.0E-04	0.29%
Total	3.6E-02	100.0%

Gases and Vapors		
H-3	3.5E-02	95.95%
C-14	1.1E-05	0.03%
Kr-85	5.3E-05	0.14%
I-129	9.3E-04	2.54%
Particulates		
Am-241	1.7E-05	0.05%
Cs-137	1.7E-04	0.46%
Pu-238	5.0E-05	0.14%
Pu-239	7.2E-05	0.20%
Pu-240	1.2E-05	0.03%
Pu-241	5.7E-06	0.02%
Alpha	3.5E-05	0.10%
Non-Volatile		
Beta	1.2E-04	0.34%
Total	3.6E-02	100.0%

NOTE: (a) Committed effective dose

NOTE: (b) Radionuclides contributing 0.01% or more of the total dose

Data Table A-22. POPDOSE-SR Population Dose from Airborne Releases

Data Table A-22, POPDOSE-SR Population Dose from Airborne Releases

2015 Population Dose from Airborne Releases (person-rem)

Plume	3.8E-03	0.35%
Ground	1.1E-02	0.95%
Inhalation	8.8E-01	79.6%
Vegetation	3.4E-02	3.09%
Cow Milk	1.8E-01	15.91%
Meat	1.4E-03	0.13%
Total	1.1E+00	100.0%

Gases and Vapors		
H-3	1.1E+00	96.8%
C-14	1.1E-04	0.01%
Kr-85	3.8E-03	0.35%
I-129	1.0E-02	0.93%
Particulates		
Am-241	8.4E-04	0.08%
Cs-137	9.7E-03	0.89%
Pu-238	2.5E-03	0.22%
Pu-239	3.5E-03	0.32%
Pu-240	5.8E-04	0.05%
Pu-241	2.8E-04	0.03%
Alpha	2.3E-03	0.21%
Non-Volatile Beta	8.1E-04	0.07%
Total	1.1E+00	100.0%

NOTE: (a) Committed effective dose

NOTE: (b) Radionuclides contributing 0.01% or more of the total dose

Data Table A-23. Airborne Releases by Source and Stack Height for NESHAP

Data Table A-23, Airborne Releases by Source and Stack Height for NESHAP

2 Pages

2015 Airborne Releases by Source and Stack Height for NESHAP: Units are Curies

Radionuclide	200' Stack Reactors, Separations, and SRNL	Ground Diffuse/Fugitive	Total
GASES AND VAPORS			
H-3 (oxide)	1.12E+04	5.36E+03	1.66E+04
H-3 (elemental)	1.54E+03	9.28E+02	2.47E+03
H-3 Total	1.28E+04	6.29E+03	1.91E+04
C-14	1.37E-02	1.30E-06	1.37E-02
Kr-85	2.78E+03		2.78E+03
I-129	1.87E-03	5.49E-05	1.93E-03
PARTICLES			
F-18		4.00E-02	4.00E-02
Ni-59		5.76E-11	5.76E-11
Co-60		4.37E-07	4.37E-07
Ni-63		5.62E-09	5.62E-09
Se-79		4.90E-09	4.90E-09
Sr-89		6.02E-10	6.02E-10
Sr-90	6.77E-06	3.76E-05	4.44E-05
Y-90	1.12E-05	3.32E-05	4.44E-05
Y-91		7.98E-10	7.98E-10
Nb-94		2.42E-07	2.42E-07
Nb-95		3.63E-07	3.63E-07
Zr-95		1.22E-07	1.22E-07
Tc-99		3.87E-07	3.87E-07
Ru-103		5.11E-10	5.11E-10
Rh-106		1.19E-08	1.19E-08
Ru-106		3.04E-06	3.04E-06
Ag-110m		1.48E-11	1.48E-11
Sn-123		6.66E-12	6.66E-12
Sb-125		1.18E-06	1.18E-06
Sb-126		1.70E-07	1.70E-07
Sn-126		1.70E-07	1.70E-07
Te-127		1.04E-11	1.04E-11
Te-129		1.05E-12	1.05E-12
Cs-134		4.31E-07	4.31E-07
Cs-137	1.75E-06	1.17E-03	1.18E-03
Ce-141		4.94E-11	4.94E-11
Ce-144		2.00E-08	2.00E-08

Data Table A-23, Airborne Releases by Source and Stack Height for NESHAP

2 Pages

2015 Airborne Releases by Source and Stack Height for NESHAP: Units are Curies

Radionuclide	200' Stack Reactors, Separations, and SRNL	Ground Diffuse/Fugitive	Total
Pr-144		2.00E-08	2.00E-08
Pm-147		2.89E-06	2.89E-06
Pm-148m		1.90E-12	1.90E-12
Sm-151		2.89E-06	2.89E-06
Eu-152		5.01E-08	5.01E-08
Eu-154		3.55E-07	3.55E-07
Eu-155		1.18E-07	1.18E-07
Tl-208		1.41E-06	1.41E-06
Pb-212		8.43E-07	8.43E-07
PARTICLES			
Ra-226		2.76E-07	2.76E-07
Ra-228		2.62E-07	2.62E-07
Th-228		8.64E-10	8.64E-10
Th-229		1.56E-09	1.56E-09
Th-230		9.36E-09	9.36E-09
Th-231		2.12E-04	2.12E-04
Th-232		2.43E-09	2.43E-09
U-232		6.56E-09	6.56E-09
Pa-233		1.42E-06	1.42E-06
U-233		5.78E-09	5.78E-09
U-234	1.38E-06	5.64E-06	7.02E-06
U-235	7.60E-08	7.50E-07	8.26E-07
U-236		3.01E-08	3.01E-08
Pu-236		5.75E-10	5.75E-10
Np-237		1.61E-06	1.61E-06
Pu-238	3.42E-06	3.21E-05	3.55E-05
U-238	3.08E-06	5.61E-06	8.69E-06
Pu-239	3.94E-06	4.33E-05	4.72E-05
Pu-240		7.73E-06	7.73E-06
Am-241	6.08E-07	1.27E-05	1.33E-05
Pu-241		2.07E-04	2.07E-04
Cm-242		1.89E-16	1.89E-16
Pu-242		1.78E-08	1.78E-08
Am-243		5.26E-09	5.26E-09
Cm-244	1.82E-08	2.79E-07	2.97E-07
Unidentified Alpha	1.27E-05	1.82E-05	3.08E-05
Unidentified Beta	2.13E-05	2.07E-03	2.09E-03

Data Table A-24. Site-Specific Parameters Used with CAP88 PC for NESHAP

Data Table A-24, Site-Specific Parameters Used with CAP88 PC for NESHAP

2015 Parameters Used with CAP88 PC for NESHAP

Particle size, AMAD	
H-3 and C-14	0
All other	1
Meteorological data	2007-2011; H-Area
Plume rise	None
Number of stacks	2
Stack heights, m	0 and 61
Height of lid, m	1328
Rainfall rate, cm/yr	123.2
Average air temperature, C	18.1
Absolute humidity (g/cm ³)	12.9
Population size	781,060
Food supply fractions (fraction from local sources)	
Vegetable	0.7
Meat	0.44
Milk	0.4
EPA Food Source Scenario	Rural
State	South Carolina

Data Table A-25. Radioactive Atmospheric Releases and MEI Doses for NESHAP

Data Table A-25, Radioactive Atmospheric Releases and MEI Doses for NESHAP

2 Pages

2015 CAP88 PC Dose Calculations for NESHAP Report to EPA

Radionuclide	Releases (Curies)		Maximally Exposed Individual Dose (mrem)	Fraction of Dose
	0 m	61 m		
H-3(oxide.)	5.36E+03	1.12E+04	1.94E-02	0.872
H-3(elem.)	9.28E+02	1.54E+03	2.42E-03	0.109
Unidentified Beta (as Sr-90)	2.07E-03	2.13E-05	1.64E-04	0.007
Cs-137	1.17E-03	1.75E-06	1.20E-04	0.005
Kr-85	0.00E+00	2.78E+03	4.02E-05	0.002
Pu-239	4.33E-05	3.94E-06	2.90E-05	0.001
Pu-238	3.21E-05	3.42E-06	1.99E-05	0.001
Unidentified Alpha (as Pu-239)	1.82E-05	1.27E-05	1.74E-05	0.001
Am-241	1.27E-05	6.08E-07	6.86E-06	0.000
Pu-240	7.73E-06	0.00E+00	4.84E-06	0.000
U-234	5.64E-06	1.38E-06	4.62E-06	0.0002
Sr-90	3.76E-05	6.77E-06	3.44E-06	0.0002
Pu-241	2.07E-04	0.00E+00	2.39E-06	0.0001
C-14	1.30E-06	1.37E-02	2.16E-06	0.0001
I-129	5.49E-05	1.87E-03	1.88E-06	0.0001
Np-237	1.61E-06	0.00E+00	5.34E-07	0.0000
U-238	5.61E-06	3.08E-06	4.67E-07	0.00002
F-18	4.00E-02	0.00E+00	1.29E-07	0.00001
Ra-226	2.76E-07	0.00E+00	1.23E-07	0.00001
Cm-244	2.79E-07	1.82E-08	9.46E-08	0.00000
Nb-94	2.42E-07	0.00E+00	6.63E-08	0.000003
Sn-126	1.70E-07	0.00E+00	6.38E-08	0.000003
Ra-228	2.62E-07	0.00E+00	6.17E-08	0.000003
U-235	7.50E-07	7.60E-08	5.45E-08	0.000002
Co-60	4.37E-07	0.00E+00	3.05E-08	0.000001
Cs-134	4.31E-07	0.00E+00	1.99E-08	0.000001
Eu-154	3.55E-07	0.00E+00	1.80E-08	0.000001
Ru-106	3.04E-06	0.00E+00	1.06E-08	0.000000
Pu-242	1.78E-08	0.00E+00	1.06E-08	0.000000
Sb-125	1.18E-06	0.00E+00	8.27E-09	0.000000
U-233	5.78E-09	0.00E+00	6.53E-09	0.000000
Th-229	1.56E-09	0.00E+00	1.69E-09	0.000000
Tc-99	3.87E-07	0.00E+00	5.76E-09	0.000000
U-232	6.56E-09	0.00E+00	5.03E-09	0.000000
Eu-152	5.01E-08	0.00E+00	3.32E-09	0.000000

Data Table A-25, Radioactive Atmospheric Releases and MEI Doses for NESHAP

2 Pages

2015 CAP88 PC Dose Calculations for NESHAP Report to EPA

Radionuclide	Releases (Curies)		Maximally Exposed Individual Dose (mrem)	Fraction of Dose
	0 m	61 m		
Am-243	5.26E-09	0.00E+00	2.90E-09	0.0000001
Th-232	2.43E-09	0.00E+00	2.17E-09	0.0000001
Th-230	9.36E-09	0.00E+00	5.98E-09	0.0000001
Pb-212	8.43E-07	0.00E+00	1.40E-09	0.0000001
U-236	3.01E-08	0.00E+00	1.14E-09	0.0000001
Y-90	3.32E-05	1.12E-05	8.92E-10	0.0000000
Th-231	2.12E-04	0.00E+00	6.85E-10	0.0000000
Th-228	8.64E-10	0.00E+00	3.98E-10	0.0000000
Pm-147	2.89E-06	0.00E+00	2.72E-10	0.0000000
Pa-233	1.42E-06	0.00E+00	2.45E-10	0.0000000
Zr-95	1.22E-07	0.00E+00	2.10E-10	0.0000000
Sm-151	2.89E-06	0.00E+00	1.87E-10	0.0000000
Eu-155	1.18E-07	0.00E+00	1.80E-10	0.0000000
Nb-95	3.63E-07	0.00E+00	1.76E-10	0.00000001
Pu-236	5.75E-10	0.00E+00	1.35E-10	0.00000001
Sb-126	1.70E-07	0.00E+00	1.13E-10	0.00000001
Se-79	4.90E-09	0.00E+00	8.61E-11	0.00000000
Ce-144	2.00E-08	0.00E+00	3.66E-11	0.00000000
Ni-63	5.62E-09	0.00E+00	1.32E-12	0.00000000
Sr-89	6.02E-10	0.00E+00	3.18E-13	0.00000000
Y-91	7.98E-10	0.00E+00	3.06E-13	0.00000000
Ru-103	5.11E-10	0.00E+00	2.03E-13	0.00000000
Ag-110m	1.48E-11	0.00E+00	1.69E-13	0.00000000
Ni-59	5.76E-11	0.00E+00	6.68E-15	0.00000000
Ce-141	4.94E-11	0.00E+00	5.72E-15	0.00000000
Sn-123	6.66E-12	0.00E+00	5.05E-15	0.00000000
Pm-148m	1.90E-12	0.00E+00	3.10E-15	0.00000000
Pr-144	2.00E-08	0.00E+00	4.13E-16	0.00000000
Te-127	1.04E-11	0.00E+00	1.21E-17	0.00000000
Cm-242	1.89E-16	0.00E+00	9.76E-18	0.00000000
Tl-208	1.41E-06	0.00E+00	7.68E-18	0.0000000000
Rh-106	1.19E-08	0.00E+00	2.20E-18	0.0000000000
Te-129	1.05E-12	0.00E+00	3.39E-19	0.00000000000000002
TOTAL	6.29E+03	1.56E+04	2.22E-02	1.00

Data Table A-26. Diffuse and Fugitive Releases and MEI Doses for NESHAP

Data Table A-26, Diffuse and Fugitive Releases and MEI Doses for NESHAP

2 Pages

2015 Diffuse and Fugitive Releases and MEI Doses

Radionuclide	Releases (curies)	Maximally Exposed Individual Dose (mrem)	Fraction of Dose
H-3(oxide.)	5.36E+03	8.09E-03	0.843
H-3 (elemental)	9.28E+02	1.14E-03	0.119
Unidentified Beta (as Sr-90)	2.07E-03	1.63E-04	0.017
Cs-137	1.17E-03	1.20E-04	0.013
Pu-239	4.33E-05	2.71E-05	0.003
Pu-238	3.21E-05	1.84E-05	0.002
Unidentified Alpha (as Pu-239)	1.82E-05	1.14E-05	0.001
Am-241	1.27E-05	6.62E-06	0.001
Pu-240	7.73E-06	4.84E-06	0.001
U-234	5.64E-06	3.82E-06	0.0004
Sr-90	3.76E-05	2.96E-06	0.0003
Pu-241	2.07E-04	2.39E-06	0.0002
Np-237	1.61E-06	5.34E-07	0.0001
U-238	5.61E-06	3.21E-07	0.0000
F-18	4.00E-02	1.29E-07	0.0000
Ra-226	2.76E-07	1.23E-07	0.0000
Cm-244	2.79E-07	9.01E-08	0.0000
I-129	5.49E-05	7.90E-08	0.0000
Nb-94	2.42E-07	6.63E-08	0.0000
Sn-126	1.70E-07	6.38E-08	0.00001
Ra-228	2.62E-07	6.17E-08	0.00001
U-235	7.50E-07	5.02E-08	0.00001
Co-60	4.37E-07	3.05E-08	0.00000
Cs-134	4.31E-07	1.99E-08	0.00000
Eu-154	3.55E-07	1.80E-08	0.00000
Ru-106	3.04E-06	1.06E-08	0.00000
Pu-242	1.78E-08	1.06E-08	0.00000
Sb-125	1.18E-06	8.27E-09	0.00000
U-233	5.78E-09	6.53E-09	0.00000
Th-229	1.56E-09	1.69E-09	0.00000
Tc-99	3.87E-07	5.76E-09	0.00000
U-232	6.56E-09	5.03E-09	0.00000
Eu-152	5.01E-08	3.32E-09	0.00000
Am-243	5.26E-09	2.90E-09	0.000000
Th-232	2.43E-09	2.17E-09	0.000000

Data Table A-26, Diffuse and Fugitive Releases and MEI Doses for NESHAP

2 Pages

2015 Diffuse and Fugitive Releases and MEI Doses

Radionuclide	Releases (curies)	Maximally Exposed Individual Dose (mrem)	Fraction of Dose
Th-230	9.36E-09	5.98E-09	0.000000
Pb-212	8.43E-07	1.40E-09	0.000000
U-236	3.01E-08	1.14E-09	0.000000
Y-90	3.32E-05	7.02E-10	0.000000
Th-231	2.12E-04	6.85E-10	0.000000
Th-228	8.64E-10	3.98E-10	0.000000
C-14	1.30E-06	3.05E-10	0.000000
Pm-147	2.89E-06	2.72E-10	0.000000
Pa-233	1.42E-06	2.45E-10	0.000000
Zr-95	1.22E-07	2.10E-10	0.000000
Sm-151	2.89E-06	1.87E-10	0.000000
Eu-155	1.18E-07	1.80E-10	0.000000
Nb-95	3.63E-07	1.76E-10	0.000000
Pu-236	5.75E-10	1.35E-10	0.000000
Sb-126	1.70E-07	1.13E-10	0.000000
Se-79	4.90E-09	8.61E-11	0.000000
Ce-144	2.00E-08	3.66E-11	0.000000
Ni-63	5.62E-09	1.32E-12	0.000000
Sr-89	6.02E-10	3.18E-13	0.000000
Y-91	7.98E-10	3.06E-13	0.000000
Ru-103	5.11E-10	2.03E-13	0.000000
Ag-110m	1.48E-11	1.69E-13	0.000000
Ni-59	5.76E-11	6.68E-15	0.000000
Ce-141	4.94E-11	5.72E-15	0.000000
Sn-123	6.66E-12	5.05E-15	0.000000
Pm-148m	1.90E-12	3.10E-15	0.000000
Pr-144	2.00E-08	4.13E-16	0.000000
Te-127	1.04E-11	1.21E-17	0.000000
Cm-242	1.89E-16	9.76E-18	0.000000
Tl-208	1.41E-06	7.68E-18	0.000000
Rh-106	1.19E-08	2.20E-18	0.000000
Te-129	1.05E-12	3.39E-19	0.000000
TOTAL	6.29E+03	9.59E-03	1.00

Data Table A-27. CAP88 MEI Dose Compared to MAXDOSE-SR

Data Table A-27, CAP88 MEI Dose Compared to MAXDOSE-SR

2015 Maximally Exposed Individual Dose Commitment at Site Boundary from Atmospheric Releases

Pathway	CAP88 PC Maximally Exposed Individual		MAXDOSE-SR Representative Person	
	(Millirem) ^(a)	(Percent of Dose)	(Millirem) ^(a)	(Percent of Dose) ^(d)
Plume	4.03E-05	0.18	5.26E-05	0.16
Ground	8.88E-05	0.40	1.35E-04	0.42
Inhalation	3.62E-03	16.16	1.21E-02	37.70
Food ^(b)	1.86E-02	83.26	1.98E-02	61.71
Total	2.24E-02		3.21E-02	

Radionuclide	CAP88 PC Maximally Exposed Individual		MAXDOSE-SR Representative Person	
	(Millirem) ^(a)	(Percent of Dose)	(Millirem) ^(a)	(Percent of Dose) ^(d)
Gases and Vapors				
H-3 ^(c)	2.18E-02	98.14	3.08E-02	95.88
C-14	2.16E-06	0.01	1.07E-05	0.03
Kr-85	4.02E-05	0.18	5.26E-05	0.16
I-129	1.88E-06	0.01	7.91E-04	2.46
Particulates				
Am-241	6.86E-06	0.03	1.67E-05	0.05
Cs-137	1.20E-04	0.54	1.41E-04	0.44
Pu-238	1.99E-05	0.09	4.96E-05	0.15
Pu-239	2.90E-05	0.13	7.17E-05	0.22
Pu-240	4.84E-06	0.02	1.20E-05	0.04
Pu-241	2.39E-06	0.01	5.72E-06	0.02
Sr-90	3.44E-06	0.02	3.39E-06	0.01
Alpha	1.74E-05	0.08	3.52E-05	0.11
Non-Volatile Beta	1.64E-04	0.74	1.31E-04	0.41
Total	2.22E-02		3.21E-02	

NOTE: (a) Committed effective dose.

NOTE: (b) Meat, milk, and vegetables.

NOTE: (c) Dose from tritium in foods calculated with absolute humidity of 12.9 g water/cubic meter of air.

NOTE: (d) Radionuclides contributing 0.01% or more from MAXDOSE-SR output.

Data Table A-28. CAP88 PC Population Dose Compared to POPDOSE-SR

Data Table A-28, CAP88 PC Population Dose Compared to POPDOSE-SR

2015 Collective Committed Dose from Atmospheric Releases

Pathway	CAP88 Code		POPDOSE-SR Code	
	Person-rem ^(a)	Percent of Dose	Person-rem ^(a)	Percent of Dose ^(d)
Plume	6.28E-03		3.80E-03	0.35
Ground	1.30E-02		1.05E-02	0.95
Inhalation	5.49E-01		8.75E-01	79.57
Food ^(b)	2.61E+00		2.10E-01	19.13
Total	3.18E+00		1.10E+00	

Radionuclide	CAP88 Code		POPDOSE-SR Code	
	Person-rem(a)	Percent of Dose	Person-rem(a)	Percent of Dose(d)
<i>Gases and Vapors</i>				
H-3 ^(c)	3.12E+00	98.22	1.06E+00	96.81
C-14	3.16E-04	0.01	1.13E-04	0.01
Kr-85	6.27E-03	0.20	3.80E-03	0.35
I-129	2.93E-04	0.01	1.02E-02	0.93
<i>Particulates</i>				
Am-241	7.88E-04	0.02	8.39E-04	0.08
Cs-137	1.76E-02	0.55	9.72E-03	0.89
Pu-238	2.30E-03	0.07	2.45E-03	0.22
Pu-239	3.34E-03	0.11	3.53E-03	0.32
Pu-240	5.53E-04	0.02	5.77E-04	0.05
Pu-241	2.74E-04	0.01	2.75E-04	0.03
Alpha	2.07E-03	0.07	2.30E-03	0.21
Non-Volatile Beta	2.21E-02	0.70	8.09E-04	0.07
Total	3.18E+00		1.10E+00	

NOTE: (a) Committed effective dose equivalent

NOTE: (b) Meat, milk, and vegetables

NOTE: (c) Dose from tritium in foods calculated with absolute humidity of 12.9 g water/cubic meter of air

NOTE: (d) Radionuclides contributing 0.01% or more from POPDOSE-SR output.

Data Table A-29. Deer and Hog Hunter Doses

Data Table A-29, Deer and Hog Hunter Doses

2015 Deer and Hog Hunter Doses

Onsite Deer Hunter (Actual Hunter)			
Maximum Individual Dose determined by EMS lab analysis =		12.87	mrem
1 animal harvested (1-hog)			
Total gross (live) weight =	221 lbs	100	kg
Total edible weight =	99 lbs	45	kg
Offsite Deer Hunter Dose (Hypothetical Hunter)			
Mean of the gross cesium-137 concentration in onsite deer =		1.71	pCi/g
CSRA background concentration =		0.5	pCi/g
MEI meat consumption rate =		81	kg/y
Cesium-137 adult dose coefficient (from DOE-STD-1196-2011) =		5.03E-05	mrem/pCi
Dose =		4.93	mrem
Offsite Hog Hunter Dose (Hypothetical Hunter)			
Mean of the gross cesium-137 concentration in onsite hogs =		0.91	pCi/g
CSRA background concentration =		0.5	pCi/g
MEI meat consumption rate =		81	kg/y
Cesium-137 adult dose coefficient (from DOE-STD-1196-2011) =		5.03E-05	mrem/pCi
Dose =		1.67	mrem

Data Table A-30a. Average Concentration in Composites Used in the Dose Calculations (pCi/g)

Tables A-30 a, b, c -- Three Pages

Data Table A-30a, Average Concentration in Composites Used in the Dose Calculations (pCi/g)

Page 1 of 3

Location	Species	H-3	Sr-89,90	Cs-137	I-129	Tc-99
Augusta	Bass					
Lock + Dam	Catfish	2.72E-02				
	Panfish					
U3R	Bass	1.05E-01	2.72E-03			6.70E-02
Mouth	Catfish		1.91E-03			8.18E-02
	Panfish	9.57E-02				
Fourmile	Bass	5.32E-02	2.48E-03	6.32E-02		
Branch Mouth	Catfish					
	Panfish	3.11E-01	3.18E-03	7.52E-02		
Steel Creek	Bass			1.54E-01		
Mouth	Catfish	9.14E-02		7.31E-02	1.77E-02	
	Panfish		5.68E-03			
L3R	Bass		2.10E-03	1.54E-01	7.78E-03	5.98E-02
Mouth	Catfish		1.65E-03	4.37E-02		6.89E-02
	Panfish	1.29E-01	3.82E-03			6.69E-02
Hwy-301	Bass	9.84E-02		2.51E-02		
Bridge Area	Catfish	2.85E-01		2.75E-02		
	Panfish	1.99E-01	3.87E-03	2.63E-02		

Note: Averages are based on three composites of up to five fish of each species from each location.

At least one of the three composite samples had to have a significant result for an average concentration to be reported.

Data Table A-30b. Total Dose from Consumption of 24 kg/y from Savannah River Fish (mrem)

Data Table A-30b, Total Dose from Consumption of 24 kg/y from Savannah River Fish (mrem)

Location	Species	H-3	Sr-90	Cs-137	I-129	Tc-99	Total
Augusta	Bass						0.00E+00
Lock + Dam	Catfish	5.07E-05					5.07E-05
	Panfish						0.00E+00
U3R	Bass	1.96E-04	8.70E-03			8.07E-03	1.42E-02
Mouth	Catfish		6.11E-03			6.54E-03	1.26E-02
	Panfish	1.78E-04					1.78E-04
Fourmile	Bass	9.92E-05	7.93E-03	7.46E-02			8.27E-02
Branch Mouth	Catfish						0.00E+00
	Panfish	5.80E-04	1.02E-02	8.88E-02			9.96E-02
Steel Creek	Bass			1.82E-01			1.82E-01
Mouth	Catfish	1.70E-04		8.63E-02	1.90E-01		2.77E-01
	Panfish		1.82E-02				1.82E-02
L3R	Bass		6.71E-03	1.82E-01	8.36E-02	4.78E-03	2.77E-01
Mouth	Catfish		5.27E-03	5.16E-02		5.51E-03	6.24E-02
	Panfish	2.41E-04	1.22E-02			5.35E-03	1.78E-02
Hwy-301	Bass	1.83E-04		2.96E-02			2.98E-02
Bridge Area	Catfish	5.31E-04		3.25E-02			3.30E-02
	Panfish	3.71E-04	1.24E-02	3.11E-02			4.38E-02

Data Table A-30c. Total Risk from Consumption of 24 kg/y from Savannah River Fish (risk/year)

Data Table A-30c, Total Risk from Consumption of 24 kg/y from Savannah River Fish (risk/year)

Location	Species	H-3	Sr-90	Cs-137	I-129	Tc-99	Total
Augusta	Bass						0.00E+00
Lock + Dam	Catfish	4.25E-11					4.25E-11
	Panfish						0.00E+00
U3R	Bass	1.64E-10	6.22E-09			9.70E-09	1.28E-08
Mouth	Catfish		4.37E-09			7.85E-09	1.22E-08
	Panfish	1.50E-10					1.50E-10
Fourmile	Bass	8.31E-11	5.67E-09	5.67E-08			6.25E-08
Branch Mouth	Catfish						0.00E+00
	Panfish	4.86E-10	7.27E-09	6.75E-08			7.53E-08
Steel Creek	Bass			1.38E-07			1.38E-07
Mouth	Catfish	1.43E-10		6.56E-08	8.20E-08		1.48E-07
	Panfish		1.30E-08				1.30E-08
L3R	Bass		4.80E-09	1.38E-07	3.60E-08	5.74E-09	1.85E-07
Mouth	Catfish		3.77E-09	3.92E-08		6.61E-09	4.96E-08
	Panfish	2.02E-10	8.74E-09			6.42E-09	1.54E-08
Hwy-301	Bass	1.54E-10		2.25E-08			2.27E-08
Bridge Area	Catfish	4.45E-10		2.47E-08			2.51E-08
	Panfish	3.11E-10	8.85E-09	2.36E-08			3.28E-08

Data Table A-31. SRS Supplemental Release Criteria

Data Table A-31, SRS Supplemental Release Criteria

Radionuclide Groups (a)	Removable (b) dpm/100 cm ²	Total (Fixed+Removable)(c) dpm/100 cm ²	Volumetric (d) pCi/g
Group 1 Radium, Thorium, and Transuranics: 210Po, 210Pb, 226Ra, 228Ra, 228Th, 230Th, 232Th, 237Np, 239Pu, 240Pu, 241Am, 244Cm, and associated decay chains(e), and others(a)	20	500	3
Group 2 U-nat, 234U, 235U, 238U, and associated decay products(f): 14C, 22Na, 24Na, 32P, 35S, 36Cl, 45Ca, 51Cr, 54Mn, 55Fe, 59Fe, 58Co, 60Co, 63Ni, 65Zn, 89Sr, 90Sr, 94Nb, 99Tc, 106Ru, 110mAg, 109Cd, 111In, 124Sb, 125I, 129I, 131I, 134Cs, 137Cs, 144Ce, 147Pm, 152Eu, 154Eu, 192Ir, 198Au, 241Pu, and others(a)	1000	5000	30
Tritium and tritiated compounds(g)	10,000/100,000(h)	N/A	2000

(a) To determine the specific group for radionuclides not shown, a comparison of the effective dose factors, by exposure pathway, listed in Table A.1 of NCRP Report No. 123

for the radionuclides in question and the radionuclides in the general groups above shall be performed and a determination of the proper group made, based on similarity of the factors.

(b) The amount of removable radioactive material per 100 cm² of surface area should be determined by swiping the area with dry filter or soft absorbent paper, applying moderate pressure, and then assessing the amount of radioactive material on the swipe with an appropriate instrument of known efficiency. (Note - The use of dry material may not be appropriate for tritium). When removable contamination on objects of surface area less than 100 cm² is determined, the activity per unit area shall be based on the actual area and the entire surface shall be wiped. It is not necessary to use swiping techniques to measure removable contamination levels if direct scan surveys indicate that the total residual surface contamination levels are within the limits for removable contamination.

(c) The levels may be averaged over one square meter provided the maximum surface activity in any area of 100 cm² is less than three times the value specified. For purpose of

averaging, any square meter of surface shall be considered to be above the surface contamination value if: (1) from measurements of a representative number of sections it is determined that the average contamination exceeds the applicable value; or (2) it is determined that the sum of the activity of all isolated spots or particles in any 100 cm² area exceeds three times the applicable value.

(d) Volume criteria will only be applied for the purpose of release of materials for disposal in a state, DOE, permitted or approved on-site landfill.

(e) For decay chains, the screening levels represent the total activity (i.e., the activity of the parent plus the activity of all progeny) present.

(f) Alpha component of activity

(g) Tritium contamination may diffuse into the volume or matrix of materials. Evaluation of surface contamination shall consider the extent to which such contamination may

migrate to the surface in order to ensure the surface contamination value is not exceeded. Once this contamination migrates to the surface, it may be removable, not fixed; therefore, a "Total" value does not apply.

(h) The criterion of 10,000 dpm/100 cm² will be used for release of material for unrestricted use (reuse or recycle). The criterion of 100,000 dpm/100 cm² will be used for the

controlled on-site landfill disposal of material. (Note - DOE Suspension (July 2000) for recycle of metals will apply until rescinded). However, WSRC will only implement this more relaxed tritium surface criterion if a future exemption to 10CFR835 is granted.

Data Table A-32. Biota Dose Assessment

Data Table A-32, Biota Dose Assessment

Initial Level 1 Aquatic Systems Screen using Maximum Radionuclide Concentrations in Water and Sediment^(a,b)

Location	Sum-of-the-Fractions of BCGs
FM-2	0.1910
FM-2B	0.1770
FM-3A	0.1080
FM-6	0.1200
FM-A7	0.2140
L3R-1A	0.0676
Z-Area Basin	0.3640
PB-3	0.0854
SC-2A	0.4470
SC-4	0.0931
TB-5	0.0319
U3R-4	0.0492

Initial Level 1 Terrestrial Systems Screen using Maximum Radionuclide Concentrations in Soil^(a,b)

Location	Sum-of-the-Fractions of BCGs
F-Area	0.00831
H-Area	0.01530
Z-Area	0.02200
643-26E	0.00589
Burial Ground-North	0.00742

- a. Soils and sediment are sampled on an annual basis. Stream water is generally sampled monthly.
b. Negative concentrations were assumed to be 0.
-

Level 2 Aquatic Systems Screen using Mean Radionuclide Concentrations

Location	Sum-of-the-Fractions of BCGs
N/A	N/A
